

## Overview


The Vandal Resistant Reader brings support for a vast amount of functionality encased in a tough IK10 rated construction.

Designed with vandal resistance in mind, the VR Reader includes support for all leading token technology including HID Prox®, MIFARE®, Paxton and EM as well as offering Bluetooth® for communication with long range or hands-free credentials and smartphones via the Paxton app.



## Features

- IK10 Rated
- IP67 Rated
- Multi-format reading technology offering compatibility with Paxton, MIFARE, HID Prox®, EM and more
- Built in Bluetooth® Low Energy support to allow communication to mobile and wearable devices
- Simple 4 wire installation
- Brings Paxton simplicity to the plethora of token types currently on the market by supporting all of them concurrently
- Low power sleep mode with capacitive wake-up

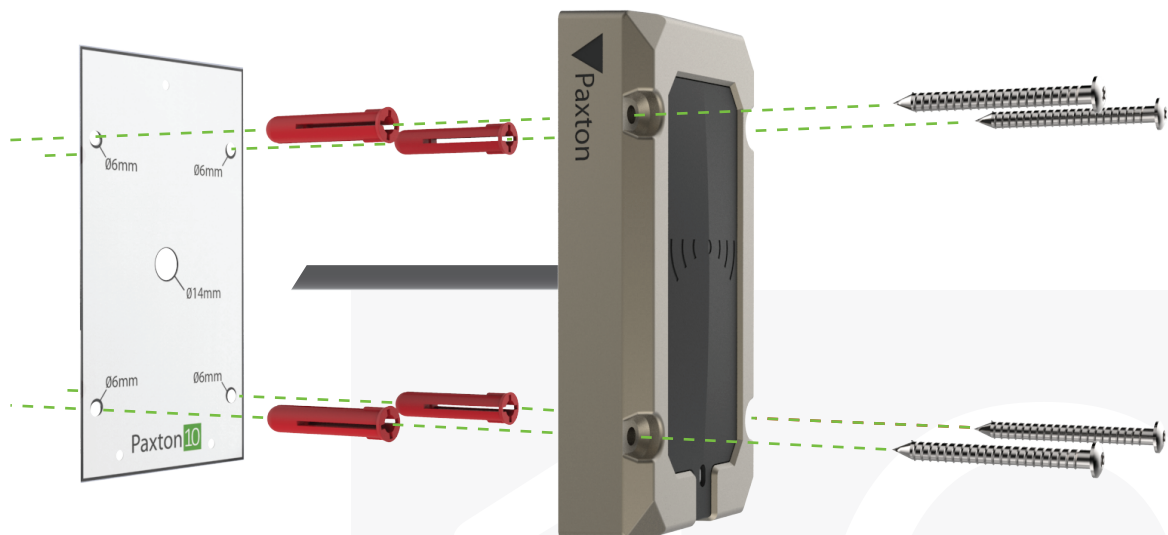



## Token compatibility

125 kHz	Paxton Hitag2, EM4100/02, HID® Prox
13.56 MHz	MIFARE® Classic (CSN only)
	MIFARE® DESFire® EV1/EV2/EV3 (CSN only)
	MIFARE® Plus (CSN only)
	MIFARE® Ultralight® (CSN only)
	MIFARE Ultralight C® (CSN only)
	MIFARE® Mini® (CSN only)
	Sony FeliCa Lite-S (CSN only), NFC®



## Electrical

Power consumption	1W (Max)
Operating voltage	12V
Current Draw	40mA (Quiescent)
	100mA (Max)



## Communication

RFID Frequency	125kHz & 13.56MHz
Data Connection	RS485/Paxton10 Protocol
Bluetooth®	2.4GHz
Token Mode	Up to 2cm
Touch to Enter	Up to 1.5m
Long Range	Up to 10m



## Hardware

Dimensions (W x H x D)	57.6mm x 106mm x 19.5mm
Cable Type	22AWG, 4 core twisted pair
Cable Length	5m / 16ft
Maximum cable extension (Controller – Reader)	100m / 328ft
Sound	Piezo Buzzer
Colour	Black
Housing material	ASTM B86
Warranty	Paxton 5 year



## Environment

Operating temperature	-35°C - +66°C
IP Rating	IP67
IK Rating	IK10
Mounting	Surface only, not suitable for mounting on metal