

Ins-30016-US

12V DC 1A power supply in plastic housing



Technical Support


☎ 1.800.672.7298



supportUS@paxton-access.com

Technical help is available: Monday - Friday from 02:00 AM - 8:00 PM (EST)

Documentation on all Paxton products can be found on our web site - <http://www.paxton-access.com/>

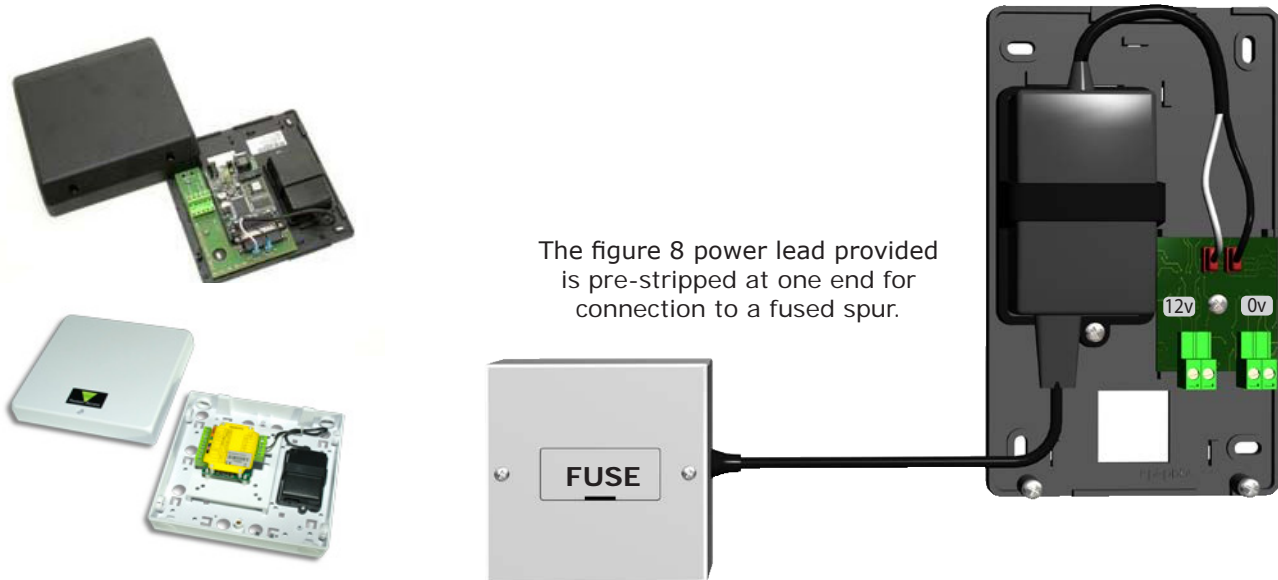

The figure 8 power lead provided is pre-stripped at one end for connection to a fused spur.

Specifications

Specifications			
Environment	Min	Max	
Operating temperature	- 20 °C (- 4 °F)	+ 55 °C (+ 131 °F)	
Waterproof			No
Cable length			6.5 feet
Electrical	Min	Max	
Input supply voltage	100V AC	240V AC	+/- 5%
Input supply frequency	50 Hz	60 Hz	+/- 3%
Voltage	11.4V DC	13.6V DC	
Output voltage ripple		100 mV	
Current		1A	
Dimensions	Width	Height	Depth
Power supply only	7 inch	4 1/4 inch	1 5/8 inch
Control unit (Black case)	7 inch	7 inch	2 inch
Control unit (White case)	7 7/8 inch	7 7/8 inch	3 inch

Class B digital devices.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Class A digital devices.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.