

Proximity reader - KP50/KP75/KP75 screw connector

System specifcations

Cable Length

5m/16ft

(Screw connector - None)

Cable extension length and type

≤ 25m/82ft ≤ 100m/328ft Belden 9538/ Belden 5506FE (USA) Belden 9540/ Belden 5306FE (USA)

Token compatibility

Paxton, EM

HID® Prox (activiation required)

Additional coloured covers available

Handsfree compatible

Wiegand

Yes (Max 50 bits)

Operating Voltage

10V - 14V DC

Current consumption

180mA

Operating temperature

-35°C - +66°C -31°F - +151°F


Moisture resistance

Medium

(Screw connector- No)

Vandal Resistance





They are available for use with both Switch2 and Net2 systems The readers are supplied with a choice of black or white covers/ bezels. The reader is wired as shown on the control unit label.


The 75 Series variant is also optionally available with a screw connector version making cabling even simpler.

Note: Be sure to avoid mounting proximity readers on metal surfaces or near other proximity readers as this will affect the read range.

A token is read by holding it within close proximity of the reader. Once a token has been read the control unit looks up the access permissions of that user. The control unit verifies the information and grants or denies access as appropriate.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes. An audible tone is emitted. When using Token + PIN, the Amber LED will flash after the token has been presented, indicating the need to enter a PIN. If an incorrect PIN is entered, access is denied and the red LED flashes. An audible tone is emitted. Using PIN ONLY, incorrect PIN's will not return an access denied response.



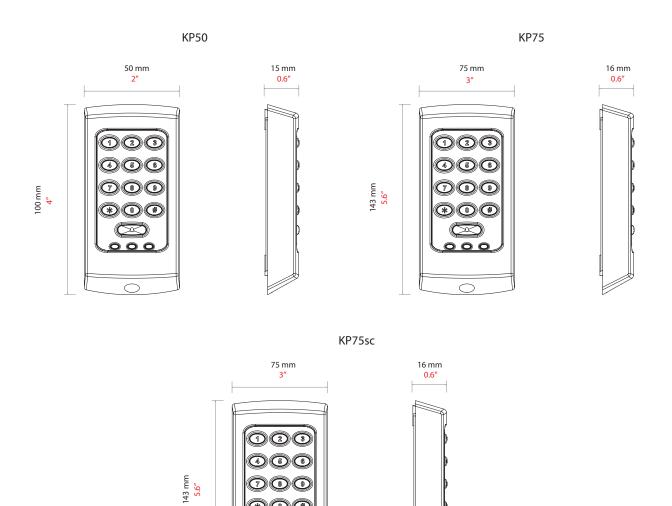

Accessories and sales codes

Proximity keypad - KP50 355-110-EX Proximity keypad - KP75 375-110-EX

Proximity keypad - KP75, screw connector 375-120-EX