

TOUCHLOCK - K50/K75/K75 screw connector

System specifications

Cable Length	5m/16ft (Screw connector - None)	
Cable extension length and type	≤ 25m/82ft	Belden 9538/ Belden 5506FE (USA) General Cable equivalent C0744A/ General Cable equivalent E2008S
	≤ 100m/328ft	Belden 9540/ Belden 5306FE (USA) General Cable equivalent C0745A/ General Cable equivalent E2038S

Backlit Keypad Yes

Electrical

Operating Voltage 10V - 14V DC
Current consumption 180mA

Environment

Operating temperature -35°C - +66°C
-31°F - +151°F

Moisture resistance IPX7
(Screw connector- No)

Vandal Resistance Medium

Certifications

FCC Part 15

UL 294 371-110-US




The K50/K75/K75 screw connector Keypads are devices that offer the simplicity of PIN or Code authentication for system users.

They are available for use with both Switch2 and Net2 systems. The readers are supplied with a choice of black or white covers/bezels. The reader is wired as shown on the control unit label.

The 75 Series variant is also optionally available with a screw connector version making cabling even simpler.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes and an audible tone is emitted. Incorrect PIN's will not return an access denied response.

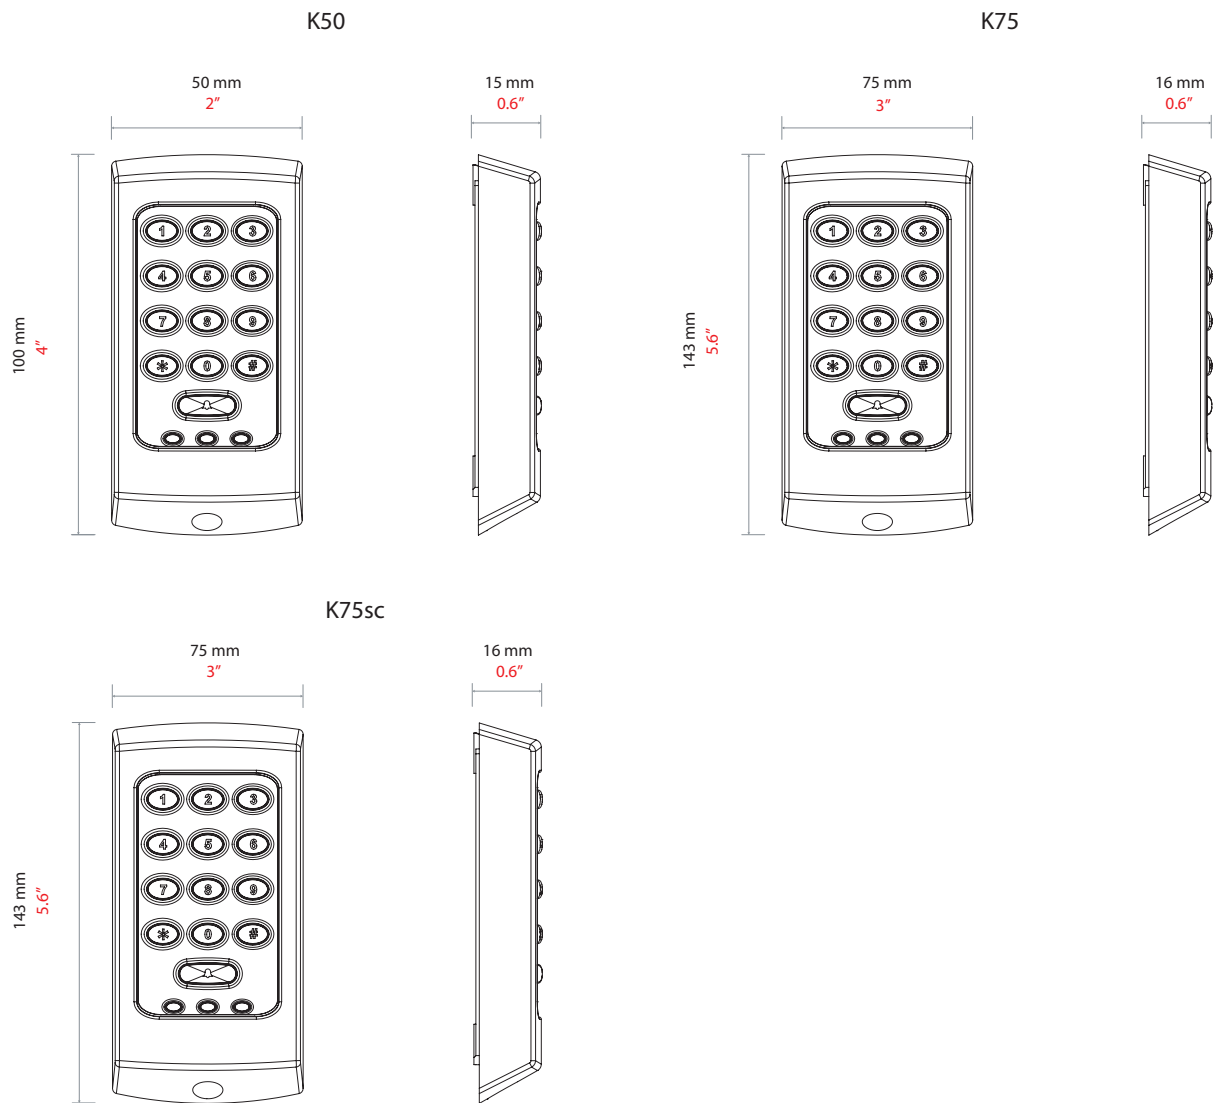

Accessories and sales codes

TOUCHLOCK K75

371-110-US

TOUCHLOCK K50

351-110-US