


Connecting ACT 1030 Proximity Reader to Net2

Unit tested: ACT 1030 Date Tested: 24/10/06
 Model: (HID reader with clock & data output)
 Card tested: HID ProxCard II

Net2 ACU Reader Connections:

Connections from reader to ACU

Reader Cable	ACU Terminal
Red	- Red
	- Brown
	- Orange
Yellow	- Green
Blue	- Yellow
Green	- Blue
	- Mauve
Black	- Black/White

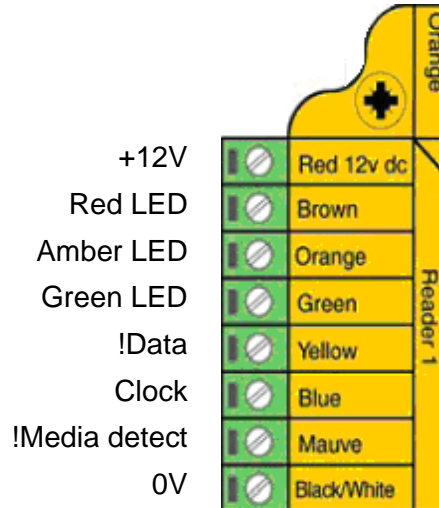

Note: Brown, White, & Orange – Not used

Additional settings:

To setup the LED configure the Registry as follows:

Run REGEDIT

HKEY_LOCAL_MACHINE → Software → Paxton Access → Access Control

LEDStyle

Modify this value to '1' and reboot the PC, then reinstate the doors from Net2.

LED: Steady Red - Waiting for a card
 Steady Green - Door open
 Flicker - User barred