

TOUCHLOCK vandal resistant metal keypad



System specifications

Cable Length	5m/16ft	
Cable extension length and type	≤ 25m/82ft ≤ 100m/328ft	Belden 9538/ Belden 5506FE (USA) Belden 9540/ Belden 5306FE (USA)
Backlit Keypad	Yes	
Material	Zinc Alloy (Chrome plated)	

Electrical

Operating Voltage	10V - 14V DC
Current consumption	120mA


Environment

Operating temperature	-20°C - +55°C -4°F - +131°F
Moisture resistance	IPX7
Vandal Resistance	High

The vandal resistant metal keypads are devices that offer the simplicity of PIN or Code authentication for system users.

They are available for use with both Switch2 and Net2 systems. The reader is wired as shown on the control unit label.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes and an audible tone is emitted. Incorrect PIN's will not return an access denied response.

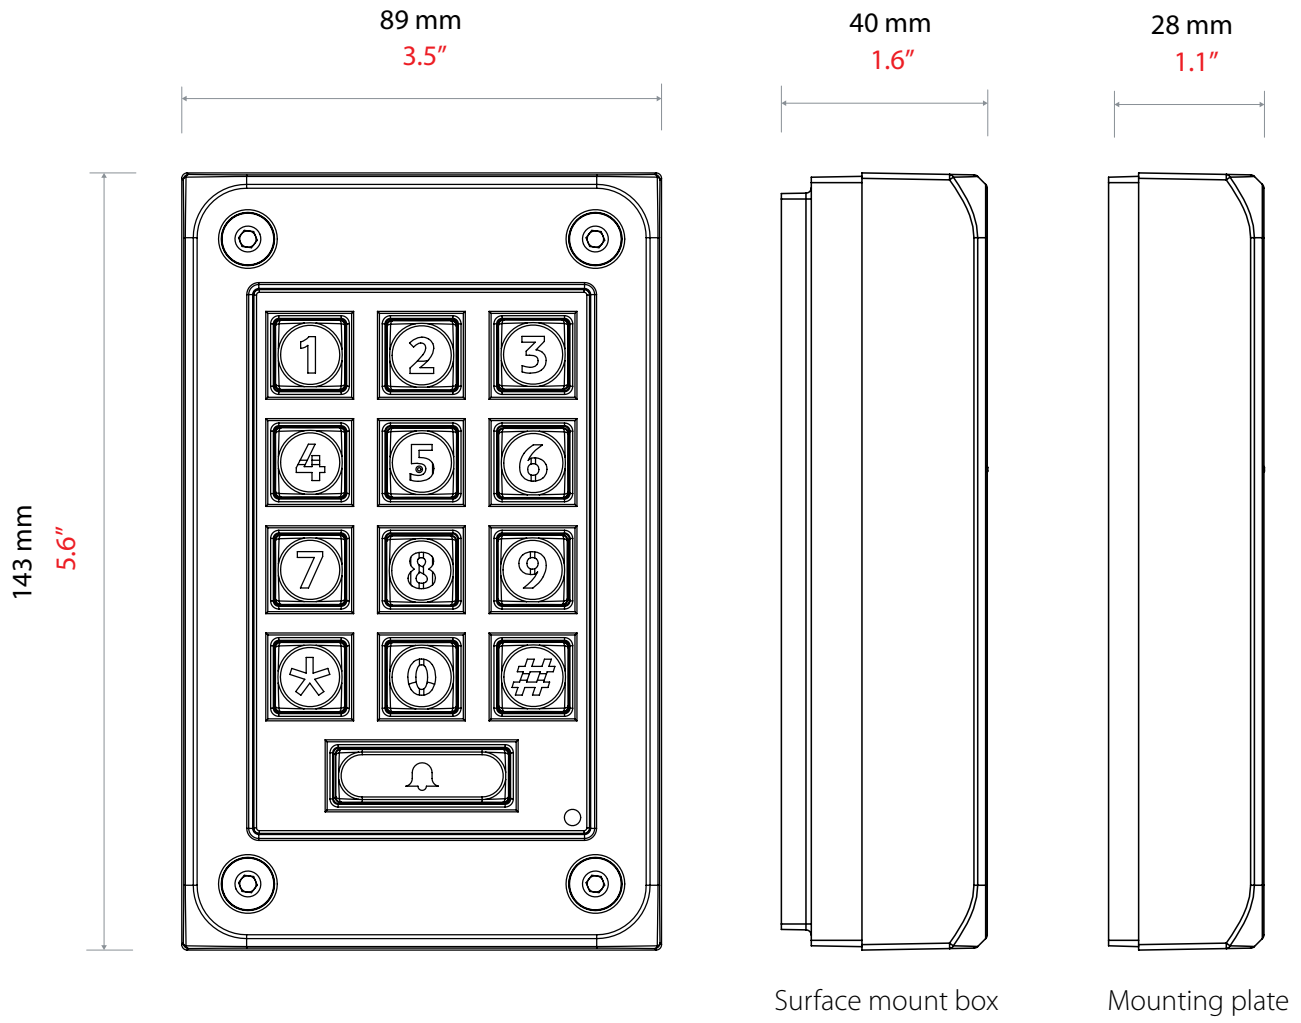

Accessories and sales codes

TOUCHLOCK vandal resistant metal keypad

521-715-EX