

TOUCHLOCK vandal resistant, metal

System specifications

Cable Length	5m/16ft	
Cable extension length and type	≤ 25m/82ft	Belden 9538/ Belden 5506FE (USA) General Cable equivalent C0744A/ General Cable equivalent E2008S
	≤ 100m/328ft	Belden 9540/ Belden 5306FE (USA) General Cable equivalent C0745A/ General Cable equivalent E2038S
Material	Zinc Alloy (Chrome plated)	
Backlit Keypad	Yes	

Electrical

Operating Voltage	10V - 14V DC
Current consumption	120mA

Environment

Operating temperature	-20°C - +55°C -4°F - +131°F
Moisture resistance	IPX7
Vandal Resistance	High

Certifications


FCC Part 15	✓
-------------	---



The vandal resistant metal keypads are devices that offer the simplicity of PIN or Code authentication for system users.

They are available for use with both Switch2 and Net2 systems. The reader is wired as shown on the control unit label.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes and an audible tone is emitted. Incorrect PIN's will not return an access denied response.

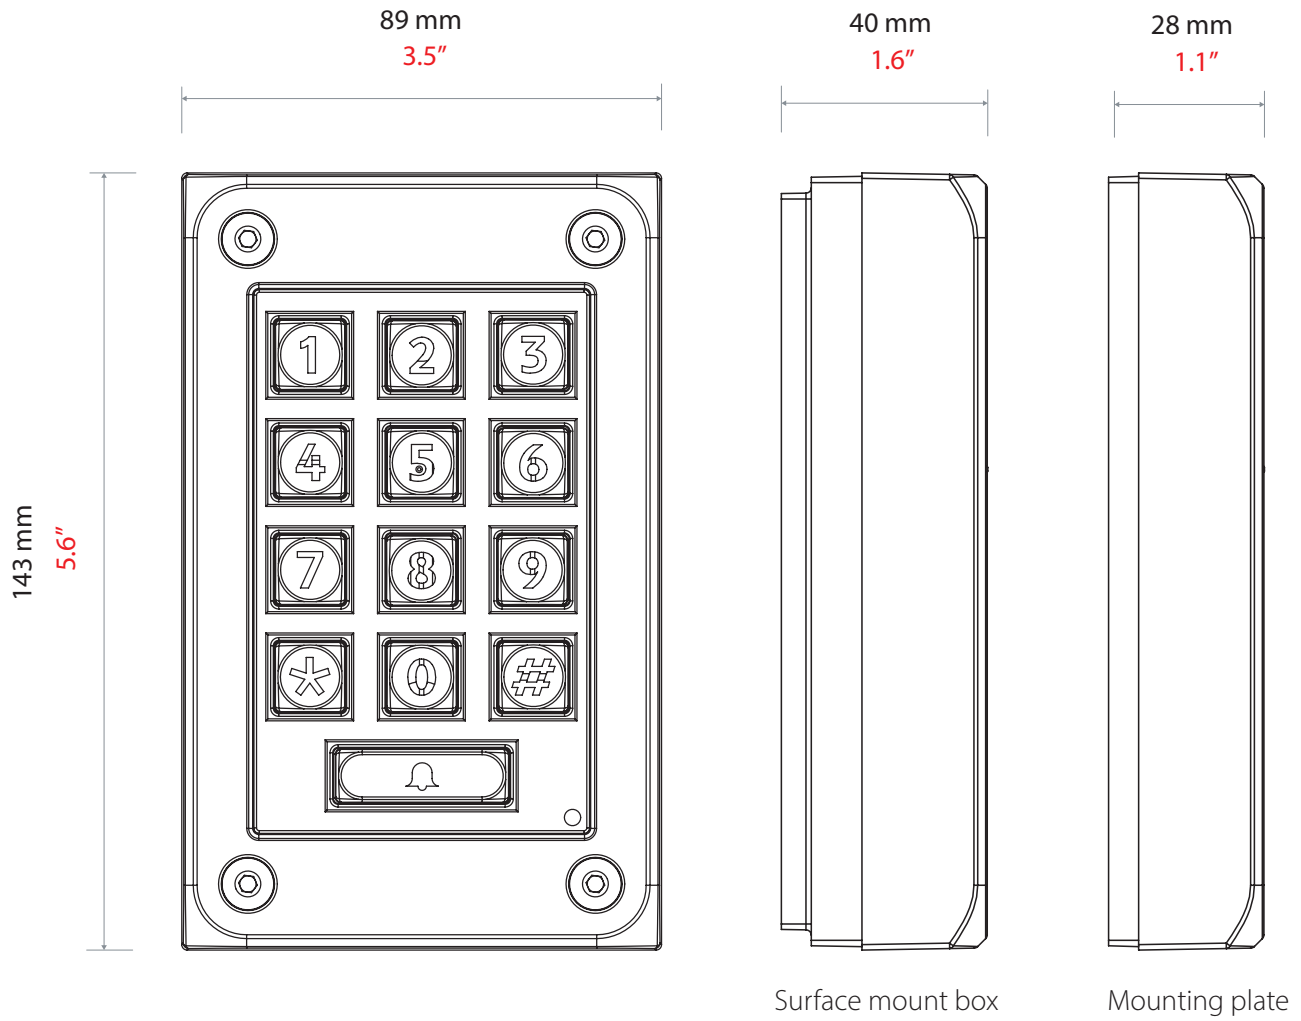

Accessories and sales codes

TOUCHLOCK Vandal resistant, metal 521-715-US