

TOUCHLOCK vandal resistant metal keypad

System specifications

| | | |
|---------------------------------|-------------------------------|---|
| Cable Length | 5m/16ft | |
| Cable extension length and type | ≤ 25m/82ft | Belden 9538/ Belden 5506FE (USA) General Cable equivalent C0744A/ General Cable equivalent E2008S |
| | ≤ 100m/328ft | Belden 9540/ Belden 5306FE (USA) General Cable equivalent C0745A/ General Cable equivalent E2038S |
| Material | Zinc Alloy (Chrome plated) | |
| Backlit Keypad | Yes | |

Electrical

| | |
|---------------------|--------------|
| Operating Voltage | 10V - 14V DC |
| Current consumption | 120mA |

Environment

| | |
|-----------------------|--------------------------------|
| Operating temperature | -20°C - +55°C -4°F - +131°F |
| Moisture resistance | IPX7 |
| Vandal Resistance | High |

Certifications


| | |
|-------------|---|
| FCC Part 15 | ✓ |
|-------------|---|



The vandal resistant metal keypads are devices that offer the simplicity of PIN or Code authentication for system users.

They are available for use with both Switch2 and Net2 systems. The reader is wired as shown on the control unit label.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes and an audible tone is emitted. Incorrect PIN's will not return an access denied response.

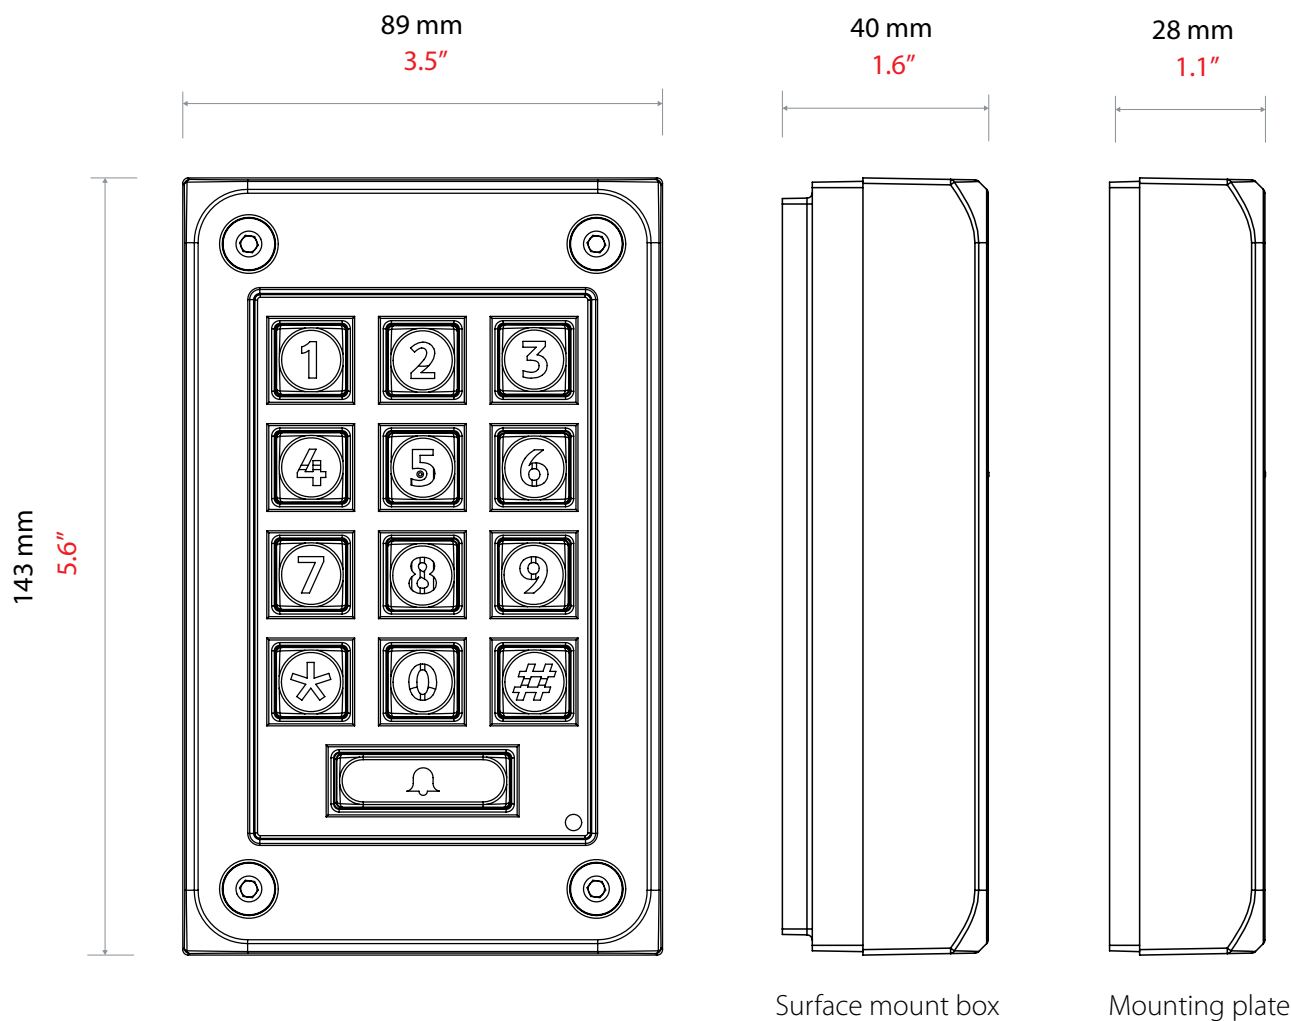

Accessories and sales codes

TOUCHLOCK vandal resistant metal keypad

521-715-US