

## Connecting Indala Flexpass to Net2


Unit tested: Flexpass  
 Model: FP3511A  
 Card tested: Wiegand 26 bit card

Date Tested: 24/03/05

### **Net2 ACU Reader Connections:**

Connections from reader to ACU

Reader Cable	ACU Terminal
Red (+V)	- Red
	- Brown
	- Orange
Brown (LED)	- Green
Green (Data)	- Yellow
White (Clock)	- Blue
	- Mauve
Black (Gnd) & Screen	- Black/White

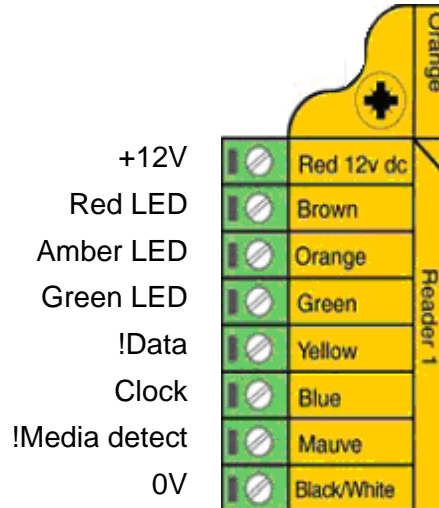

### **Additional settings:**

To setup the LED configure the Registry as follows:

Run REGEDIT

HKEY\_LOCAL\_MACHINE → Software → Paxton Access → Access Control

LEDStyle

Modify this value to '1' and reboot the PC, then reinstate the doors from Net2.

LED:           Steady Red   - Waiting for a card  
                  Steady Green - Door open  
                  Flicker        - User barred