

Net2 - Desktop reader, USB

System specifications

Cable type USB
Proximity Yes
Magstripe No
Token compatibility Paxtr

Paxton EM

MIFARE * (UID only)

Cloning resistance Low

Electrical

Operating voltage 5V
Current consumption 100mA


Environment

Operating temperature

0°C - +55°C +32°F - +131°F

Moisture resistance

NIA

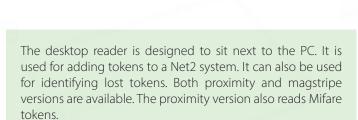


Simply plug into the USB port. No other connections are necessary. Additional workstations can also have desktop readers.

If a new token is presented to the desktop reader then the new user wizard will appear with the appropriate card number. The name and details of the new user can be entered and the token issued.

If a token which is already known to the system is presented to the desktop reader, then the relevant users' record will appear.



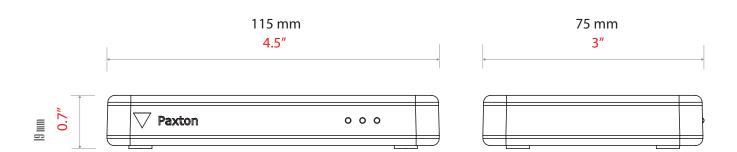

Accessories and sales codes

Net2 - Desktop reader, USB

514-326-EX

Net2 - Desktop reader, Proximity and magstripe

350-910-EX