## **Paxton**

Net2 - Desktop reader, USB

## System specifications

USB Cable type Proximity Yes Magstripe

Token compatibility

Paxton, EM4100/02, MIFARE®, MIFARE® Classic, MIFARE® DESFire® EV1, MIFARE Plus®, MIFARE Ultralight®, MIFARE Ultralight C®, MIFARE Mini®, HID® Prox (activiation required)

Operating Voltage Current consumption


100mA

Environment

Operating Temperature

0°C - +55°C +32°F - +131°F

Moisture resistance




Simply plug into the USB port. No other connections are necessary. Additional workstations can also have desktop readers.

If a new token is presented to the desktop reader then the new user wizard will appear with the appropriate card number. The name and details of the new user can be entered and the token issued.

If a token which is already known to the system is presented to the desktop reader, then the relevant users' record will



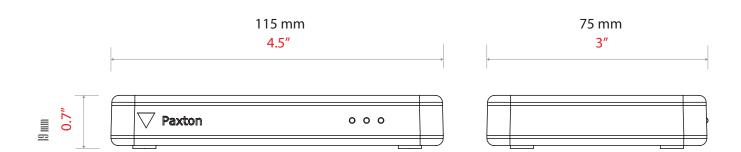

Accessories and sales codes

Net2 - Desktop reader, USB

514-326-US

Net2 - Desktop reader, proximity and magstripe USB

350-910-US