


# Connecting a Keyprocessor PX007B reader to Net2

## Overview

The PX700B reader is designed to read Hitag2 tokens. The reader was tested with 'Reader Type' set to 'Paxton reader' and produced a Clock & Data output.

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.

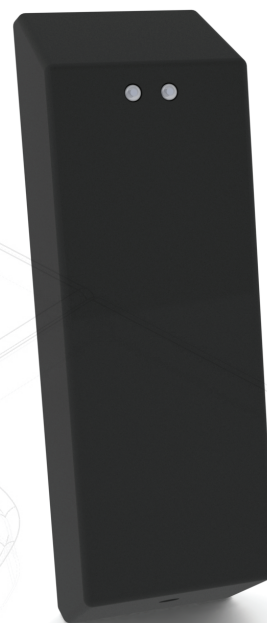

	Cable Pinout	ACU terminal
6	+5V/12V	+12V
3	Red LED	Red LED
-	-	Amber LED
-	-	Green LED
1	Data	Wiegand D0
2	Clock	Wiegand D1
4	-	NOT USED
5	Gnd	0V

10	Red 12V dc	Reader 1
10	Red LED	
10	Amber LED	
10	Green LED	
10	Data/D0	
10	Clock/D1	
10	Media Detect	
10	0V out	

Ensure any unused wires are safely terminated.



+44 (0)1273 811011  
support@paxton.co.uk  
paxton.support



+49 (0) 251 2080 6900  
support@paxton-gmbh.de  
paxton.gmbh.support



+33 (0)157 329356  
support@paxtonaccess.fr  
paxton.support



+32 (0)78485147  
support@paxton-benelux.com  
paxton.benelux.support



+31 (0)76 3333 999  
support@paxton-benelux.com  
paxton.benelux.support



+27 (0)21 4276691  
support@paxtonaccess.co.za  
paxton.support



+1 (800) 672-7298  
supportUS@paxton-access.com  
usapaxton.support



+11 5715088198  
soporte@paxton-access.com  
paxton.soporte



+1 (864) 751-3501  
soporte@paxton-access.com  
paxton.soporte



8000 3570 3783  
support@paxtonaccess.ae  
paxton.support



+44 (0)1273 811011  
support@paxton.co.uk  
paxton.support