

Entry - Standard Panel

System specifications

Power over Ethernet (PoE)	Yes - IEEE 802.3af class 0
Ethernet bandwidth requirement	1Mb/s multicast per panel during call
Panels per system	100
TCP/IP ethernet extension limit	100m/328ft
Cable type	CAT5
Token compatibility	Paxton EM MIFARE® (UID only) HID activation required
Cloning resistance	Low

Features

Audio system	Two way
Camera system	Full colour
Back-lit keypad/LCD	Yes
PIN/Code entry	Yes - only in conjunction with Net2 software & Paxton10
Bluetooth compatibility	Yes - only in conjunction with Paxton10
Bluetooth modes	'Token mode' - (Present credential to reader) 'Touch to enter' - (Smart credential or Hands free Keyfob in pocket) 'Long range' - (Smart credential or Hands free Keyfob (Up to 10m)) 'Bluetooth off'
Proximity entry	Yes
IDC connector	Optional
Colour	
Material	ABS / Polycarbonate

Environment

Operating Temperature	-20°C - +50°C -4°F - +122°F
Moisture resistance	IP55
Vandal Resistance	IK08




The Entry panel is a robust door entry panel incorporating both door entry and access control functions. It is powered using power over Ethernet (PoE) and communicates with the other elements of the system using IPv6, providing 'plug and play' installation. Each panel is associated with a Entry control unit which is the interface to the door hardware.

The panel is equipped with a keypad and a proximity token reader. A resident can use either the keypad or a token to gain entry. Installers gain access to the menu options using an engineer code or an engineer token.

Net2 or Paxton10 software can be used to administer the access control functions.

Decide how the units are to be connected. You can either run your own wired network or (with the owner's permission) share the buildings existing data network. If using the owners network, the system uses IPv6 protocol and PoE (Power over Ethernet) so the network must support this switch type.

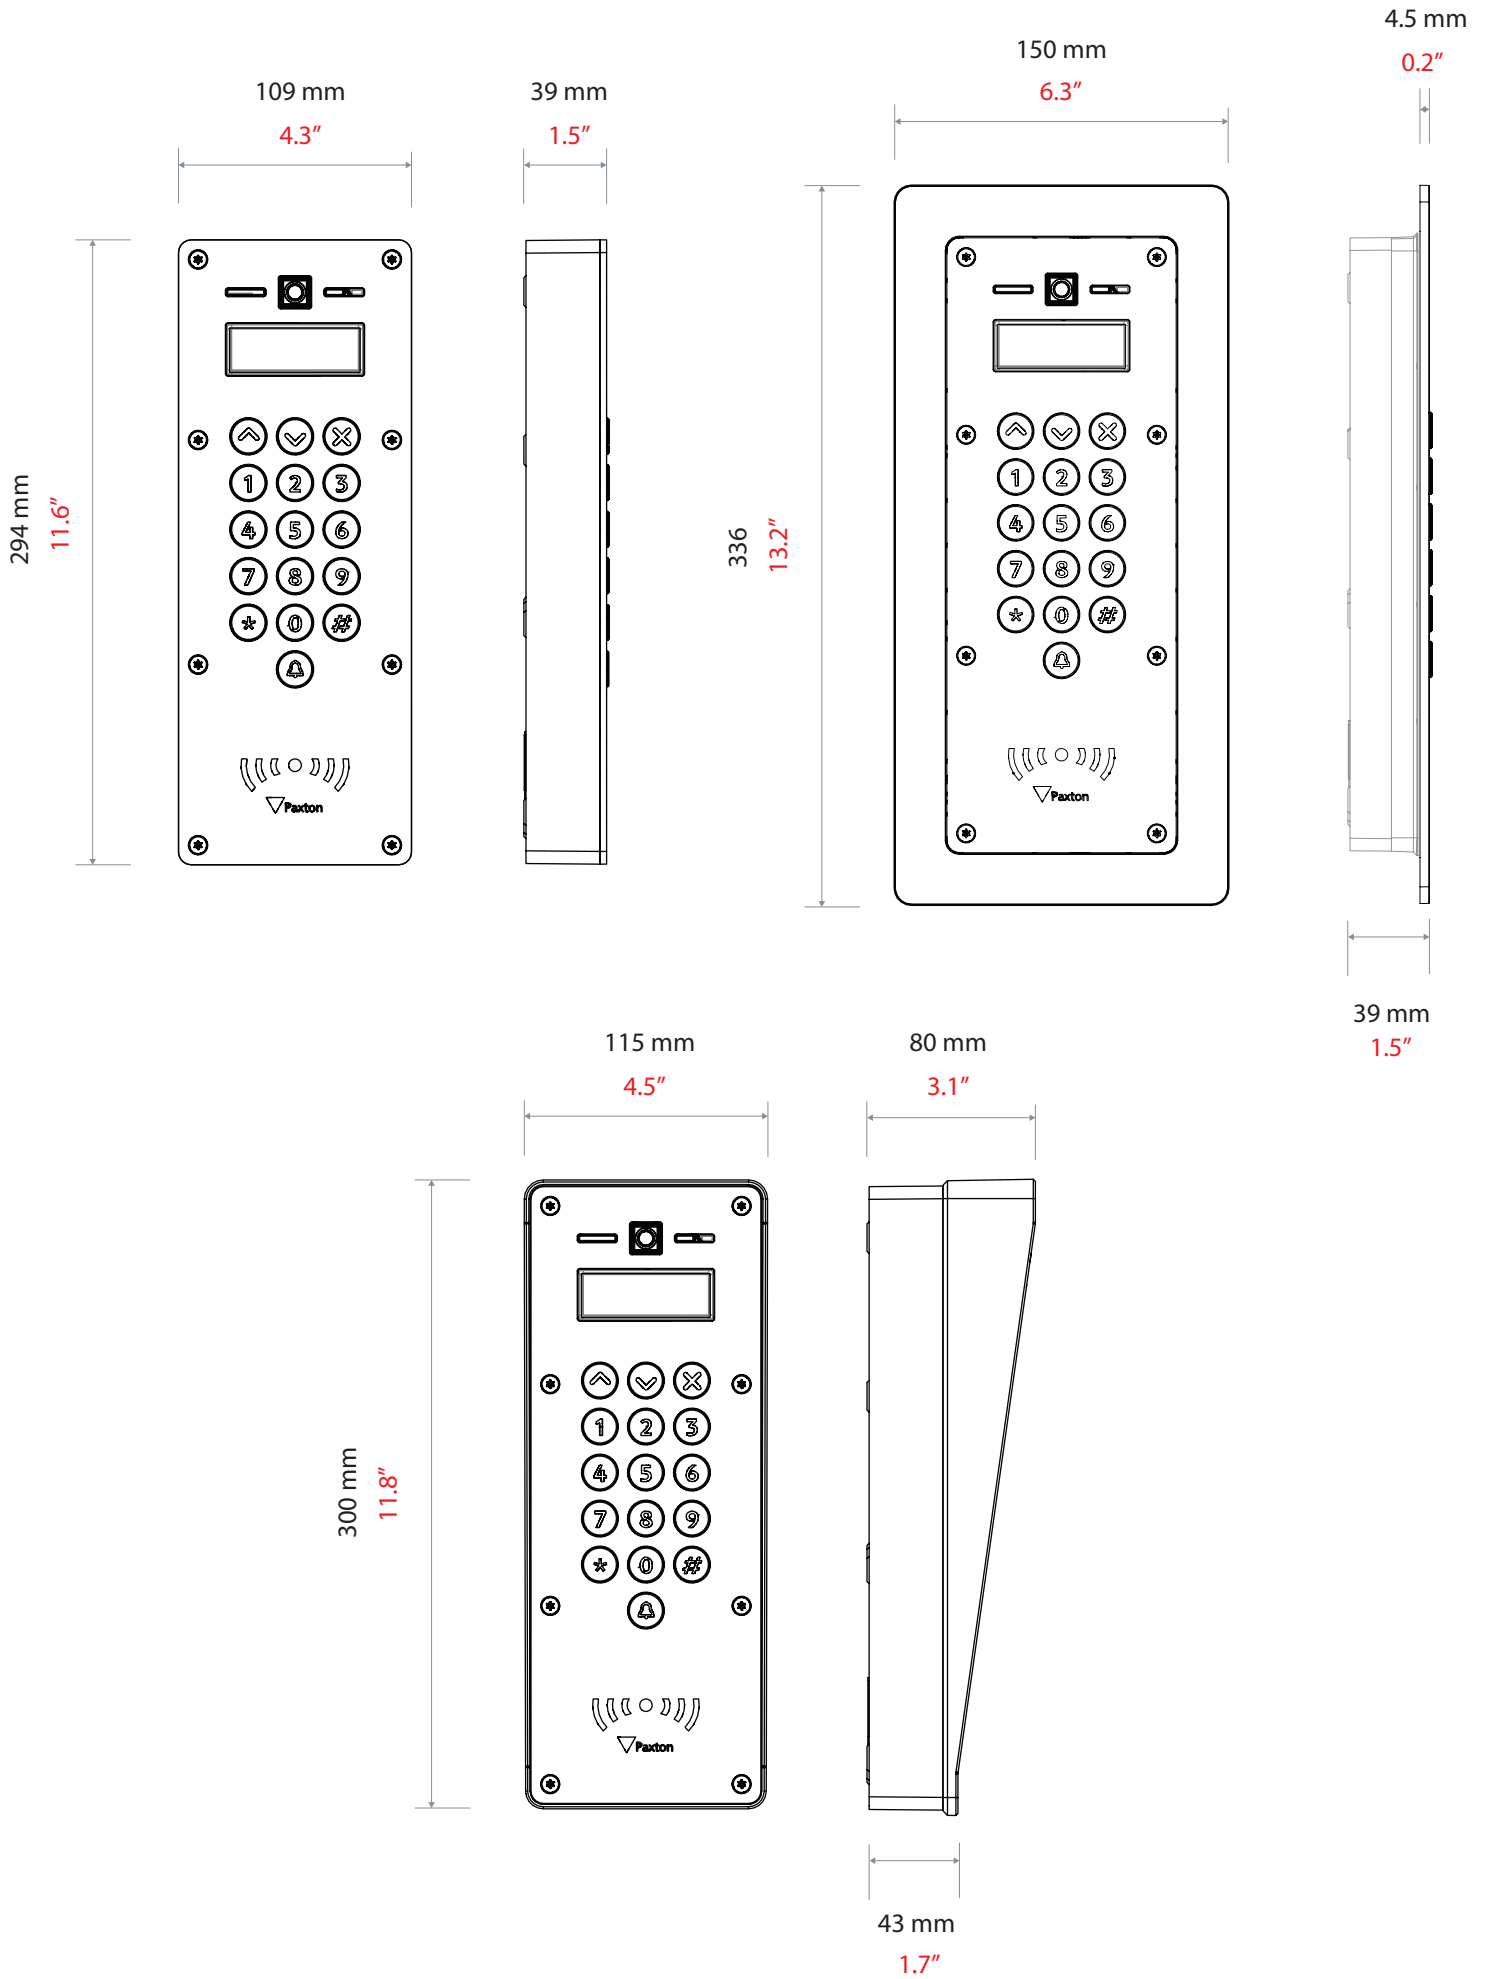

Entry - Standard panel, surface mount

337-420-EX

Entry - Standard panel, flush mount

337-400-EX

Entry - Standard panel, surface mount with
rain hood

337-410-EX

