

# Net2 proximity ISO cards – Without magstripe



### System specifications

Carrier frequency 125kHz


### Hardware features

Material Plastic

Signature strip No

Magnetic stripe No

### Dimensions

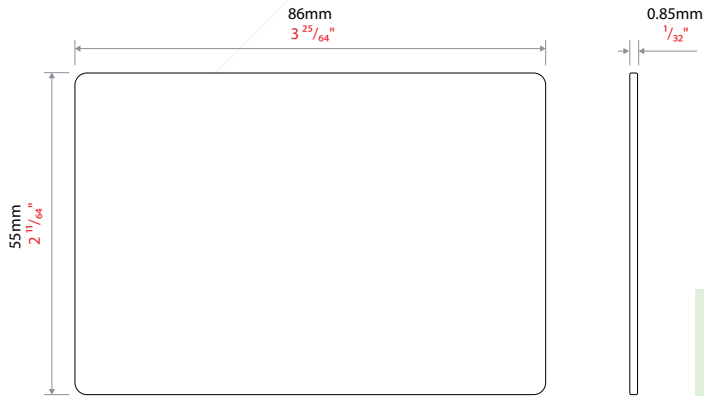

### Sales Codes

Net2 proximity ISO cards – Without magstripe, pack of 10 692-500-EX

Net2 proximity ISO card – without magstripe, pack of 500 692-052-EX

Net2 proximity ISO cards are for use with the Net2 system. The tokens are supplied in packs of 10 or 500.

To issue a token the user's details are entered using the PC software. The token number is then entered by presenting the token to the desktop reader.

Once programmed into the software the token is ready for use. Simply present the token to a reader, the access permissions will be instantly looked up and access granted or denied as appropriate. Paxton tokens use Hitag2 technology with proprietary encoding which includes an authentication protocol in the form of a password exchange between the token and the reader. This provides an additional layer of security for your system.