


Features

- Multi-format reading technology offering compatibility with Paxton, MIFARE *, HID Prox and NFC
- Brings Paxton simplicity to the plethora of token types on the market, by supporting them all concurrently
- Discrete form factor for desktop mounting
- Simple USB connection
- Paxton simplicity Zero configuration installation
- Attractive slimline design



Specifications

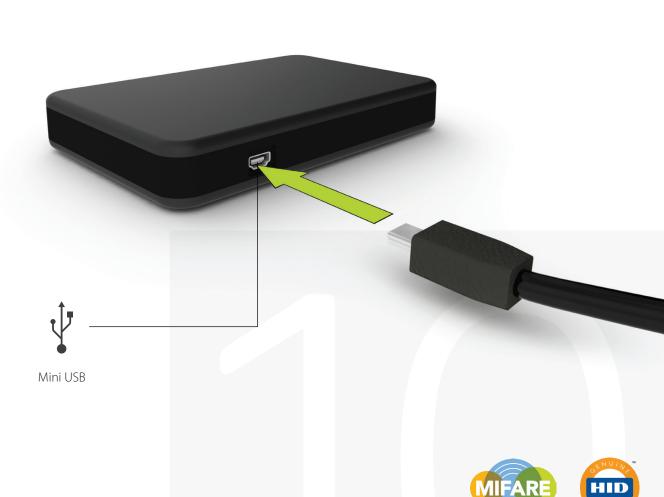



System

Token compatibility	Paxton, EM4100/02, Sony® FeliCa Lite-S
	MIFARE ® Classic, MIFARE® DESFire® EV1
	MIFARE Plus®, MIFARE Ultralight®
	MIFARE Ultralight C°, MIFARE Mini°, NFC*
	Hitag2, HID® Prox 125kHz low frequency
MIFARE compatibility	CSN
Proximity	Yes
Magstripe	No



Electrical

Power consumption	0.5 W
Operating voltage	5V (USB)



Hardware

Dimensions (W x H x D)	115mm x 19mm x 75 mm
	4 ¹⁷ / ₃₂ " × ³ / ₄ " × 2 ⁶¹ / ₆₄ "
Cable type	Mini USB to USB cable (supplied)
Cable length	1.8m/ 5.9ft
Warranty	Paxton 5 year



Environment

Operating temperature	+32°F - +120°F
IP rating	N/A

Certifications: FCC 15C

MIFARE * Classic, DESFire, MIFARE * Plus and MIFARE * Ultralight C are trademarks of NXP B.V.

*NFC refers to NFC enabled cards and tokens and does not include the use of smartphones