


## Overview

The wireless connector enables the award winning PaxLock Pro to connect to the Paxton10 system. The wireless connector communicates to the PaxLock Pro via Bluetooth®, and is designed for discreet ceiling or wall mounting.

## Features

- BLE connectivity
- Easy plug and play operation
- Health and fault finding LED's for visual diagnostics

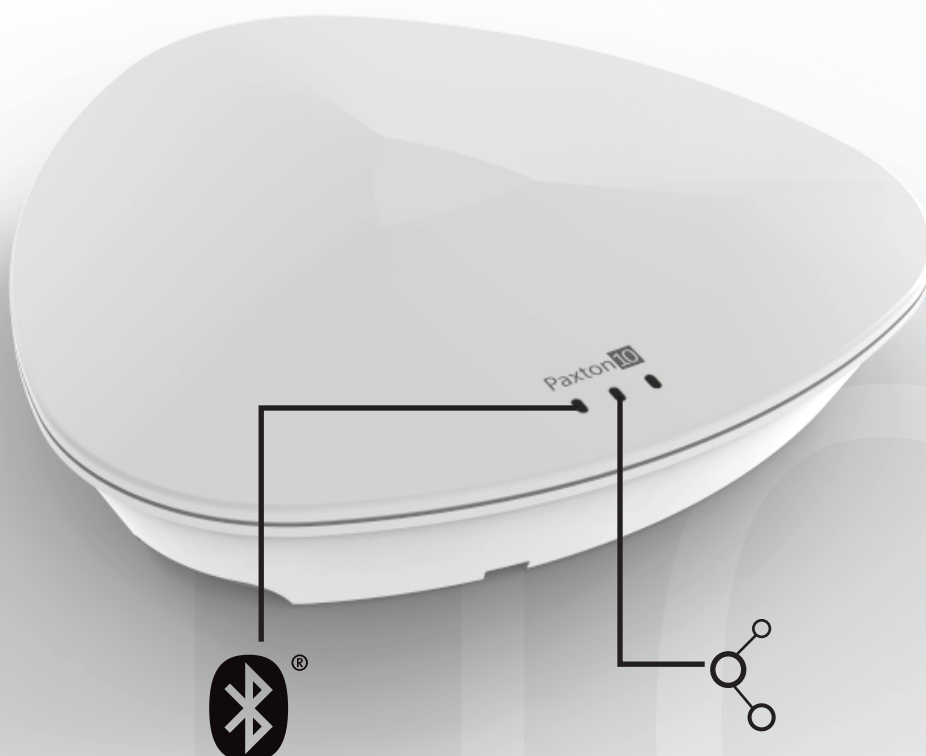



## System

|  |    |
|--|----|
| Maximum PaxLock Pros per connector           | 10 |
| Number of cascaded connectors per controller | 3  |



## Electrical

|                   |                         |
|-------------------|-------------------------|
| Power consumption | 300mA (Max)             |
| Operating voltage | Powered by RS485, 30VDC |



## Communication

|   |                         |
|---|-------------------------|
| Maximum dataline connection - Controller to Connector | 100m                    |
| Maximum dataline connection -Connector to Connector   | 100m                    |
| Data connection                                       | RS485/Paxton10 protocol |
| Wireless  | Bluetooth® 2.4GHz       |
| Typical Wireless Range (to Paxlock)                   | 15m                     |



## Hardware

|                        |  |
|------------------------|--|
| Dimensions (W x H x D) | 164mm x 163mm x 34mm                               |
| LED's                  | Green LED - Health, comms<br>Blue LED - Bluetooth® |
| Warranty               | Paxton 5 year                                      |



## Environment

|                       |  |
|-----------------------|--|
| Operating temperature | 0°C - +45°C  |
| IP Rating             | N/A - If used outside, this unit must be mounted in a suitable housing |
| Mounting              | Surface only / Backbox mounted   |



## Accessories and Sales codes

|            |                               |
|------------|-------------------------------|
| 010-687-EX | Paxton10 - Wireless Connector |
|------------|-------------------------------|