Solo

Paxton Solo – Controller

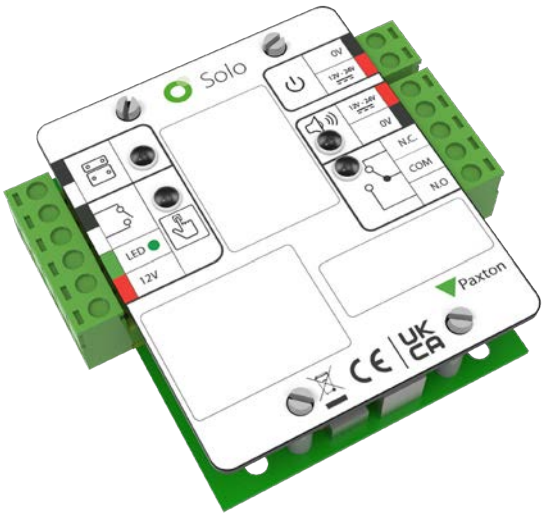

Översikt

Solo - Controller är en kompakt och enkel passerkontroll som är utformad för snabb och enkel installation.

Solo - Controller kan köpas med en 12 V DC-strömförsörjning med antingen 1 A eller 2 A. Det finns även alternativ som endast omfattar kretskort.

Funktioner

- Ingen nätverksanslutning krävs
- Ingen fysisk anslutning mellan styrenheten och DoorTag
- Strömalternativ: 12 V likström, 1 A eller 2 A
- Alternativ för plastkapslingar
- 5 års garanti

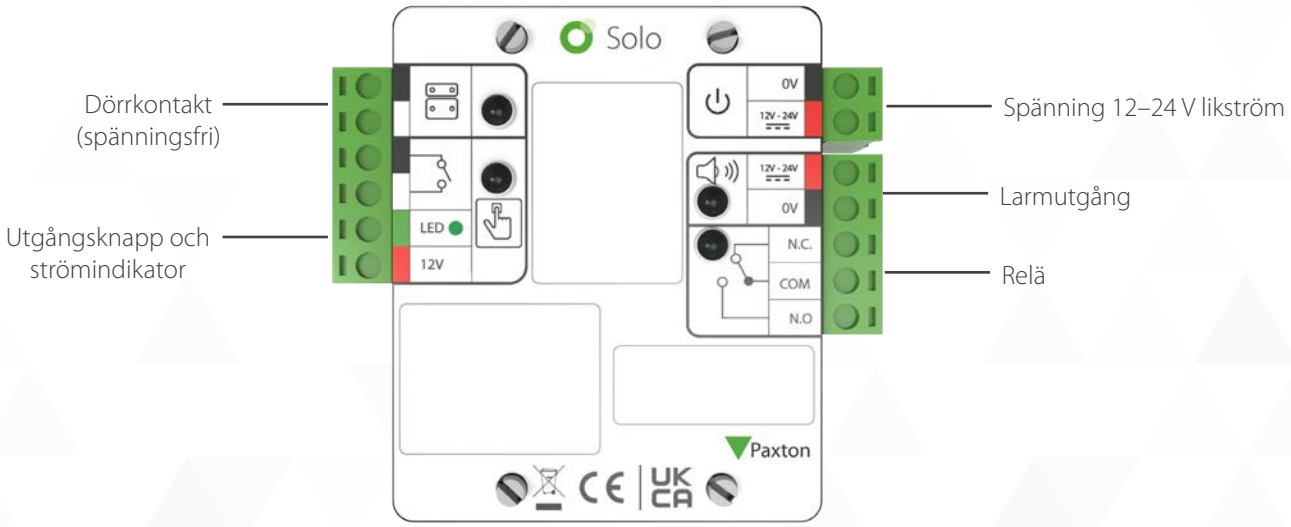

TDS-1092-SE

Paxton

Specifikationer

El

Driftspänning	12–24 V
Strömförbrukning	12 V likström, viloläge 21,95 mA
	12 V likström, aktiv, 62,72 mA
	24 V likström, viloläge 19 mA
	24 V likström, aktiv, 40,8 mA
Reservbatteri	12 V likström, 7 Ah (tillval)
Reläets märkvärde	30 V likström / 10 A
Larmutgångens ström	1A

Kommunikation

Bluetooth	BLE

Umgebung

Ingång för dörrkontakt	Ja
Inmatning för utgångsknappen	Sträva efter att
Reläer	1
Högsta antal dörrskyltar per dörr	4
Garanti	5 år

Environment

Driftstemperatur	
150-020-EX	0 °C–50 °C
150-030-EX	0 °C–40 °C
150–040-EX	0 °C–50 °C
150–050-EX	0 °C–50 °C
IP-klass	N/A
Montering	Vägg

Accessories and Sales codes

150-020-EX – Solo - Controller, with plastic housing
150-030-EX – Solo - Controller, 12V 1A PSU, with plastic housing
150-040-EX – Solo - Controller, PCB only
150-050-EX – Solo - Controller, 12V 2A PSU, with plastic cabinet

Dimensioner

150-020-EX, 150-030-EX

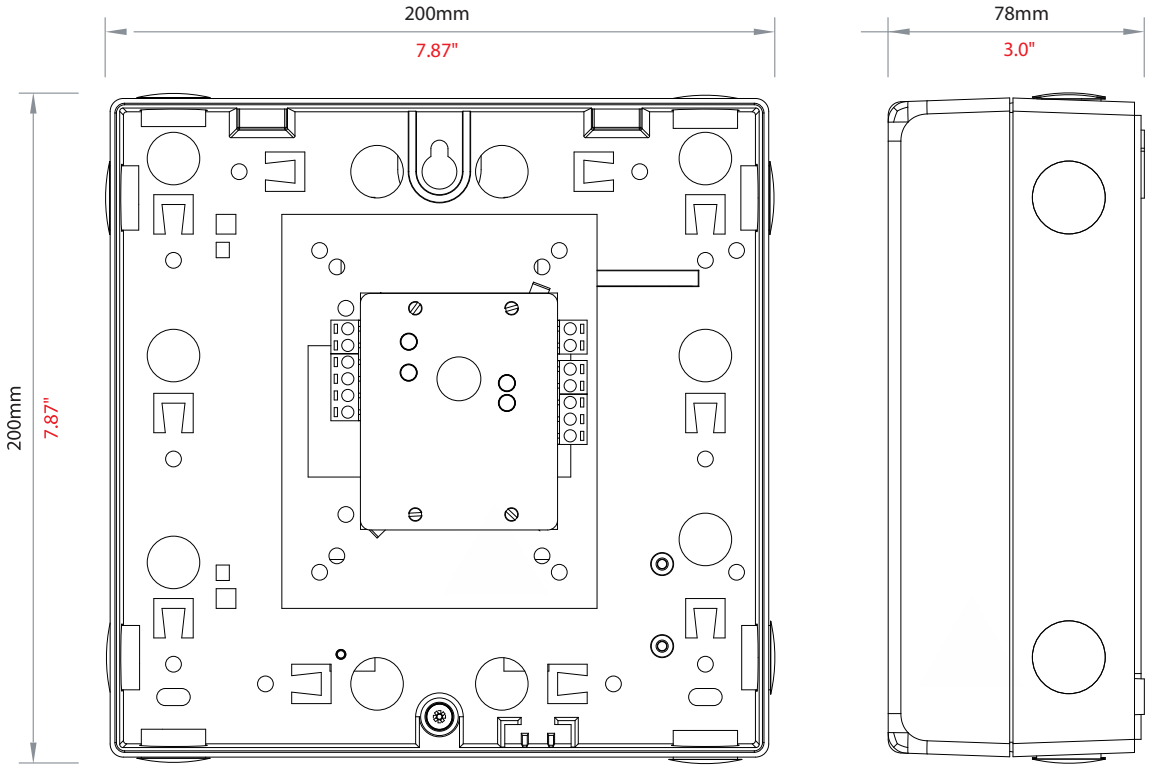

150–040-EX

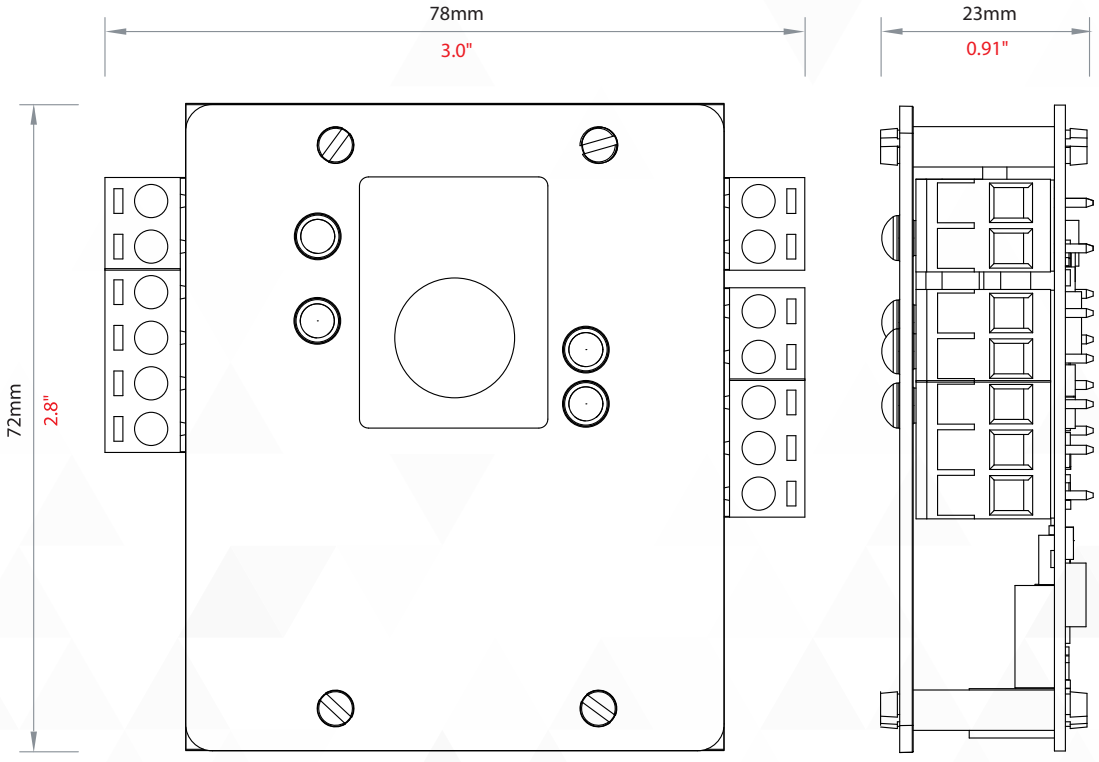

150–050

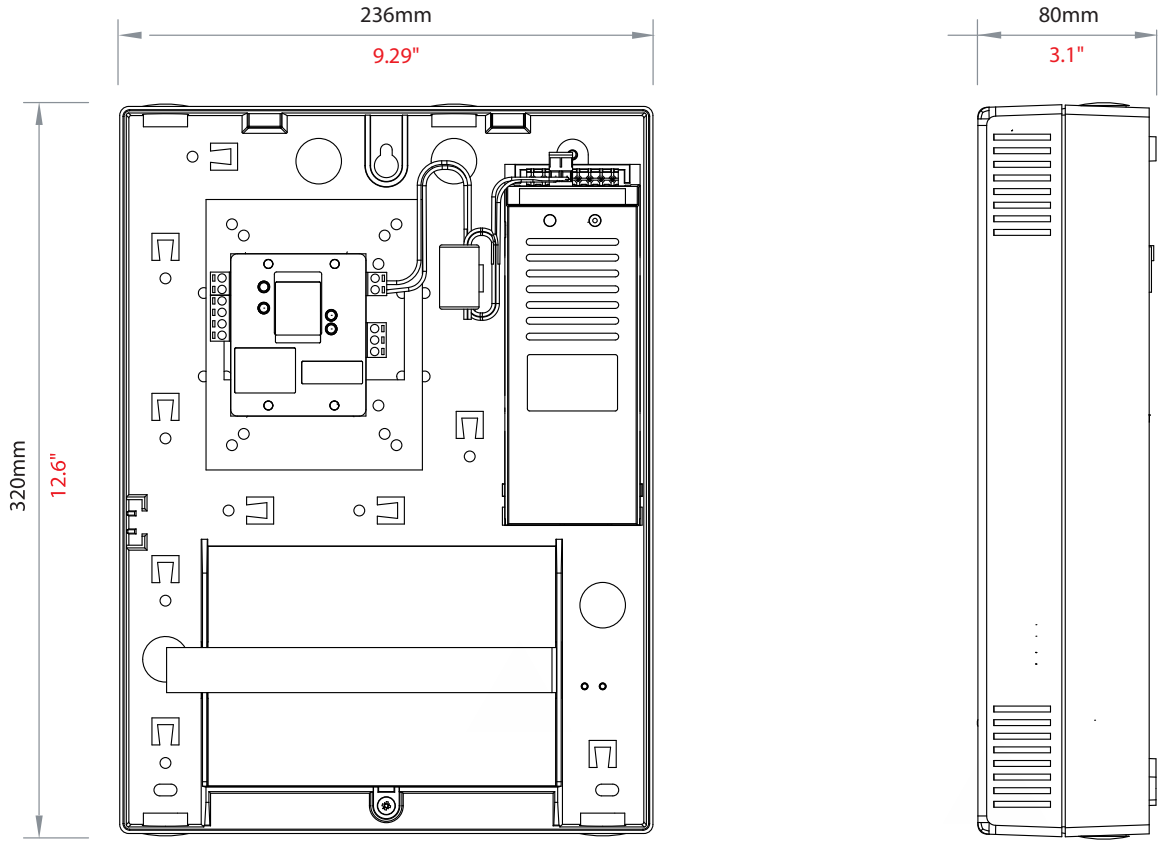

© Paxton Ltd Rev A