

PaxLock

Instructions en ligne

Online instructions

Online-Anweisungen

Online instructies

Onlineinstruktioner




<https://paxton.info/9921>



INS-30247

 Paxton

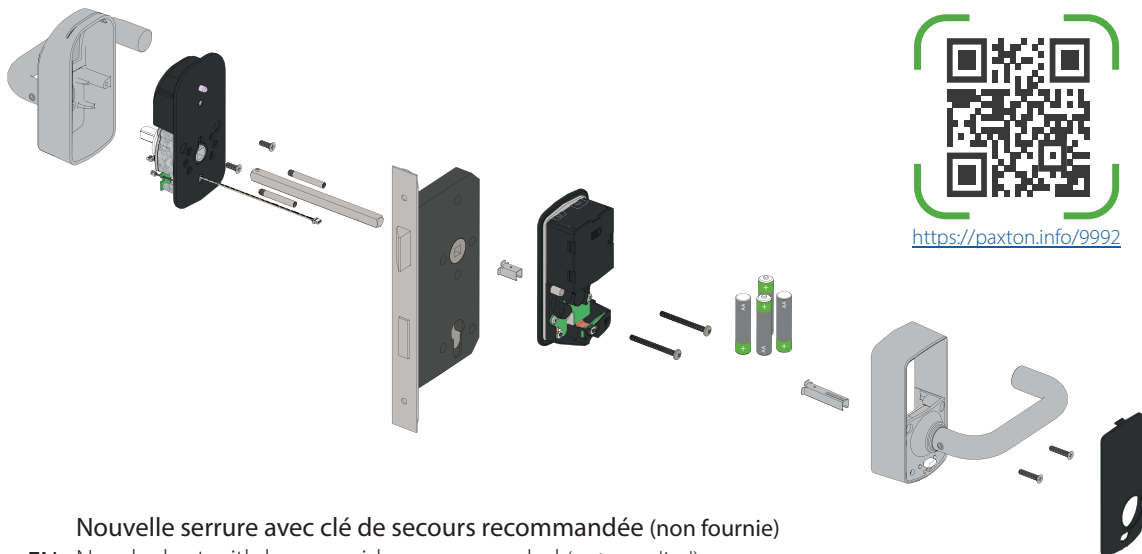


Nouvelle serrure avec clé de secours recommandée (non fournie)

- EN New lockset with key override recommended (not supplied)
- DE Neues Schloss mit Schlüsselüberbrückung empfohlen (nicht im Lieferumfang enthalten)
- NL Nieuwe insteekslot voorzien van cilinderslot aanbevolen (niet meegeleverd)
- ES Se recomienda instalar un nuevo juego de cerraduras con llave de emergencia (no incluida)
- SE Nytt låssats med nyckelöverstyrning rekommenderas (medföljer ej)



a



b



c




d



e



f




g



h



i





j



k



l

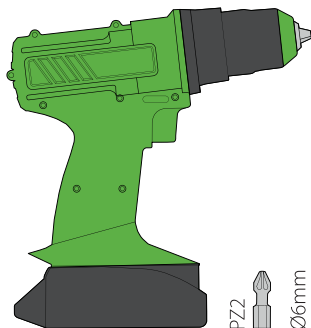

PZ2



Ø6mm





Ø9mm




Ø18mm



PZ2

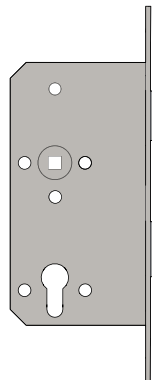


1

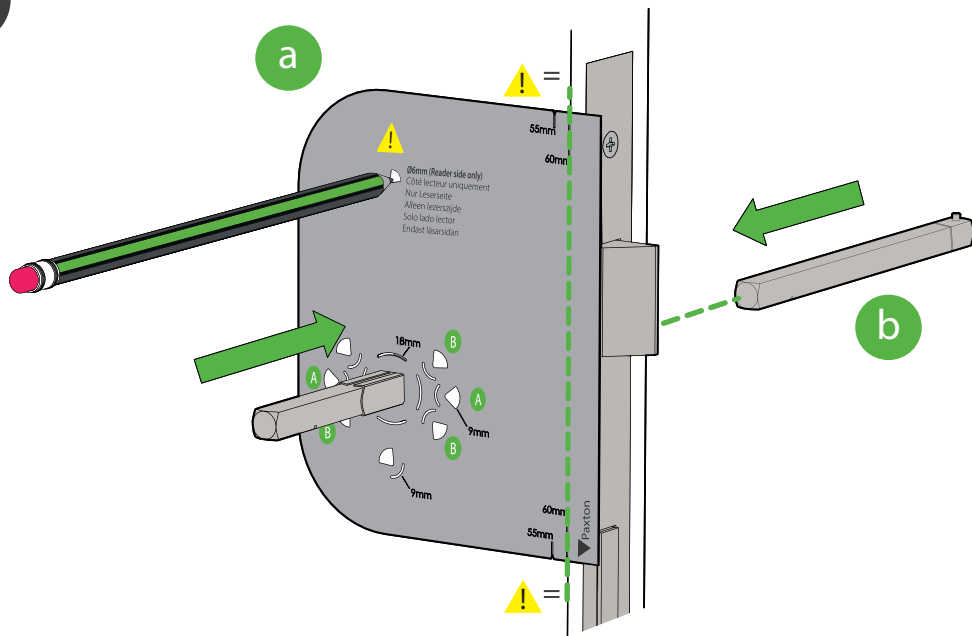


2


Extérieur uniquement

- EN Exterior only
DE Nur Außenbereich
NL Alleen buitenkant
ES Solo exterior
SE Endast exteriör

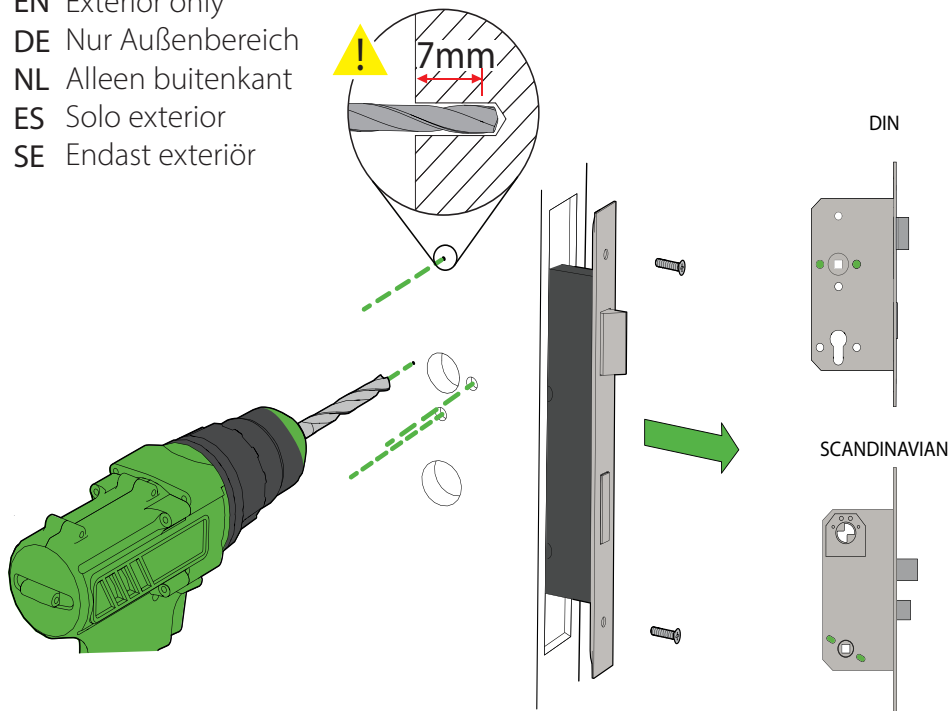


3

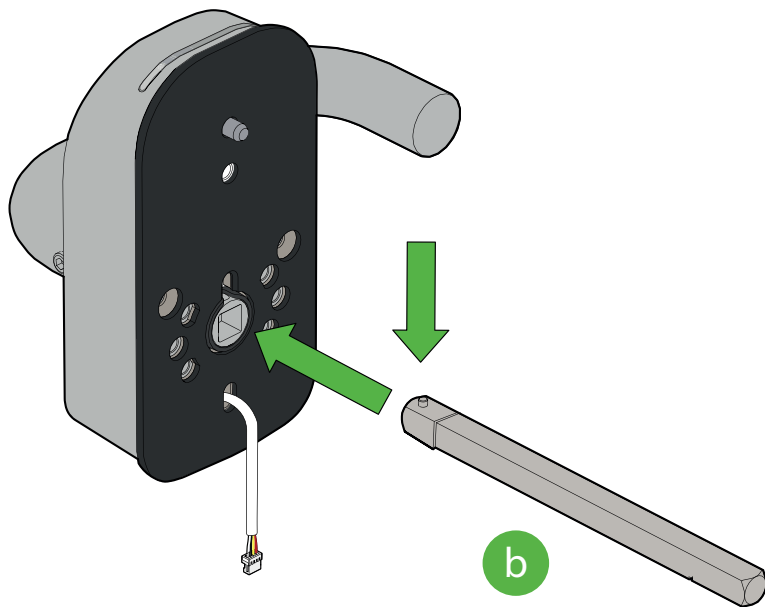


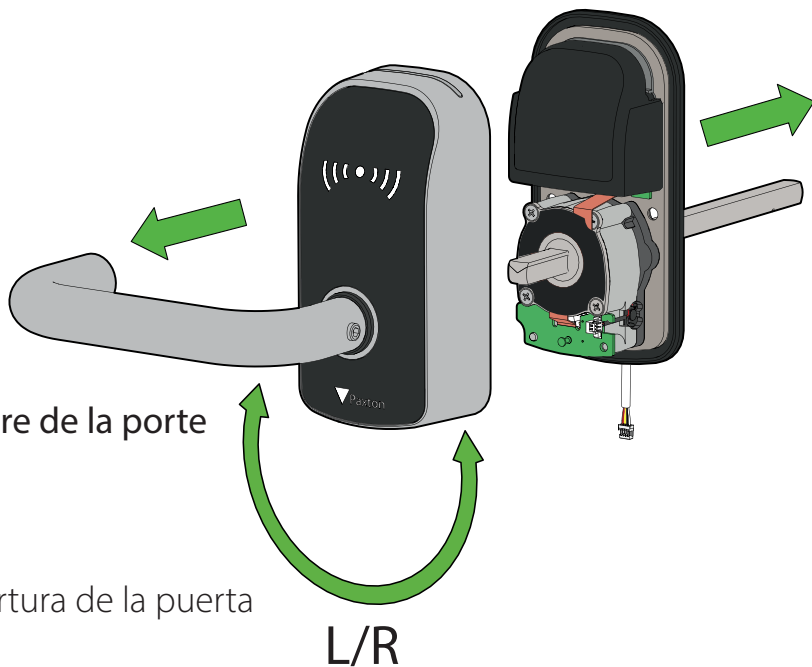

5

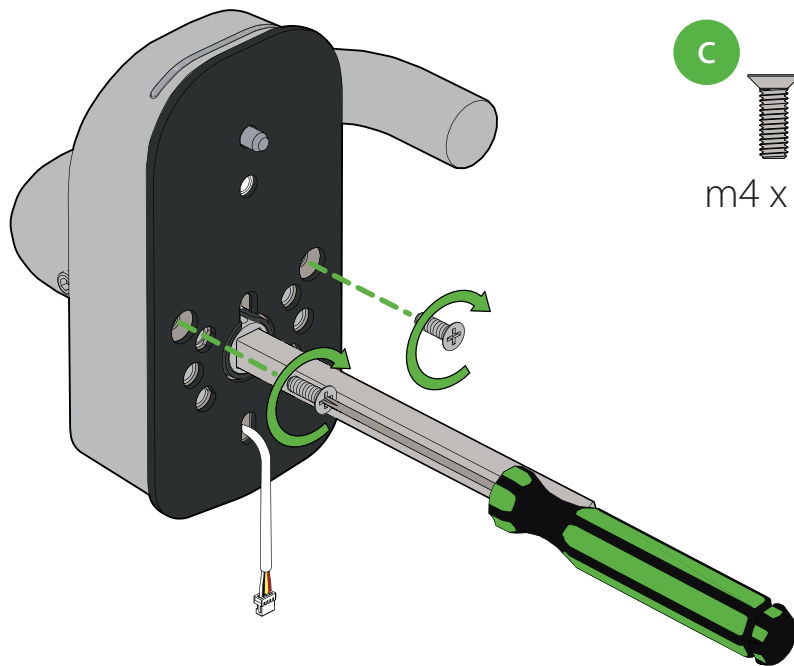


C




m4 x 12mm


6

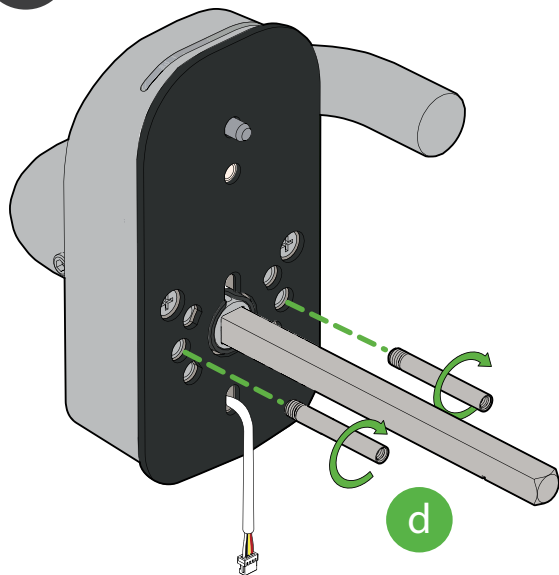

DIN

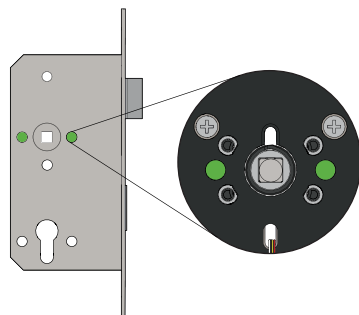


SCANDINAVIAN




7



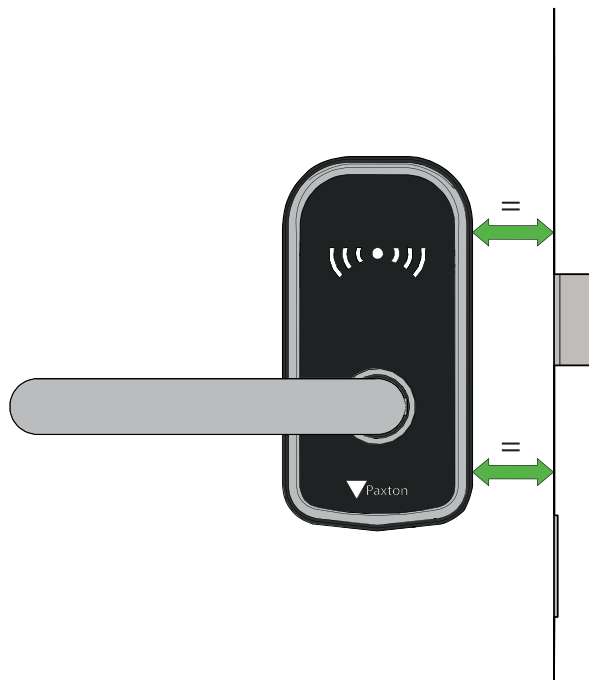

9

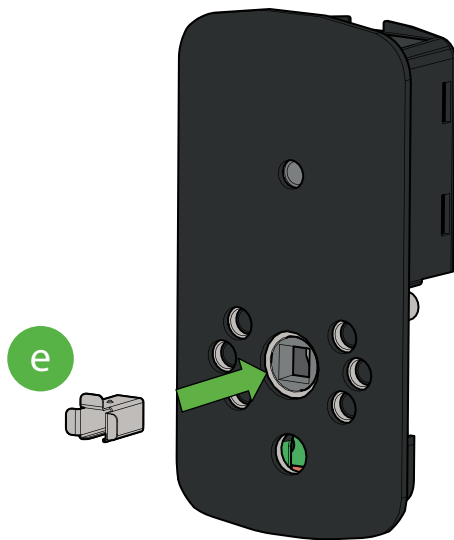

10

Épaisseur de la porte


EN Door thickness

DE Türstärke


NL Deurdikte

ES Espesor de la puerta

SE Dörrtjocklek

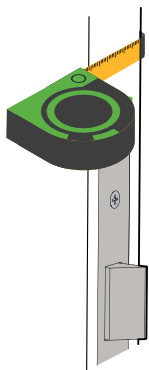

f

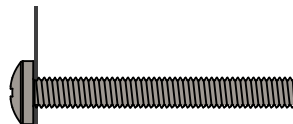

35mm - 44mm

g



44mm - 54mm


h




54mm - 62 mm

1:1

11

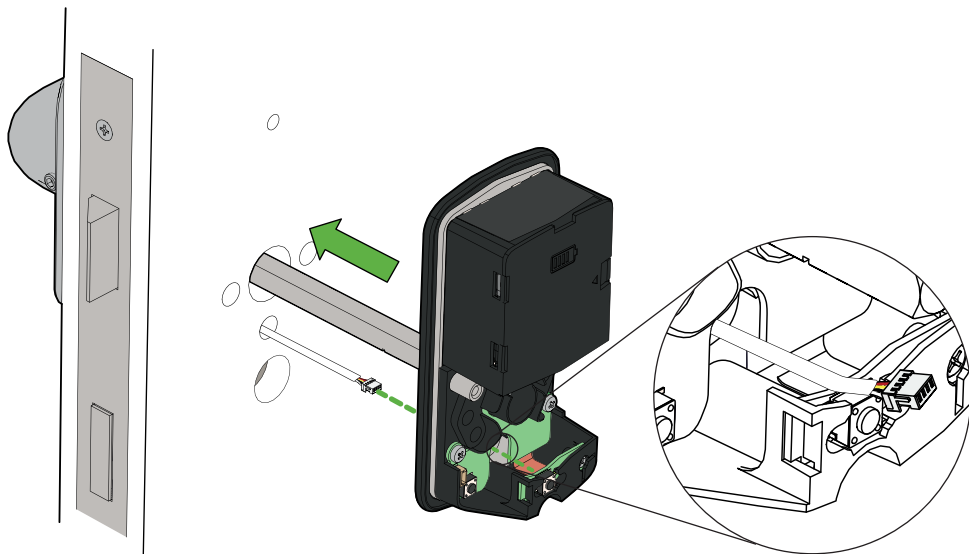

12

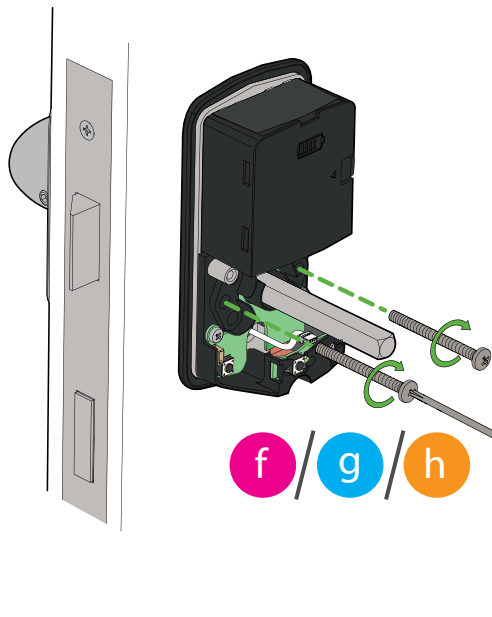

Si vous utilisez une perceuse, réglez-la sur un couple faible (≤ 2) pour éviter tout dommage.

EN

If using a drill, use a low torque setting (≤ 2) to avoid damage.

DE

Bei Verwendung einer Bohrmaschine eine niedrige Drehmomenteinstellung (≤ 2) wählen, um Beschädigungen zu vermeiden.

NL

Als u een boormachine gebruikt, stel dan een laag koppel in (≤ 2) om schade te voorkomen.


ES


Si utiliza un taladro, utilice un ajuste de par bajo (≤ 2) para evitar daños.


SE


Om du använder en bormaskin, använd ett lågt vridmoment (≤ 2) för att undvika skador.

13

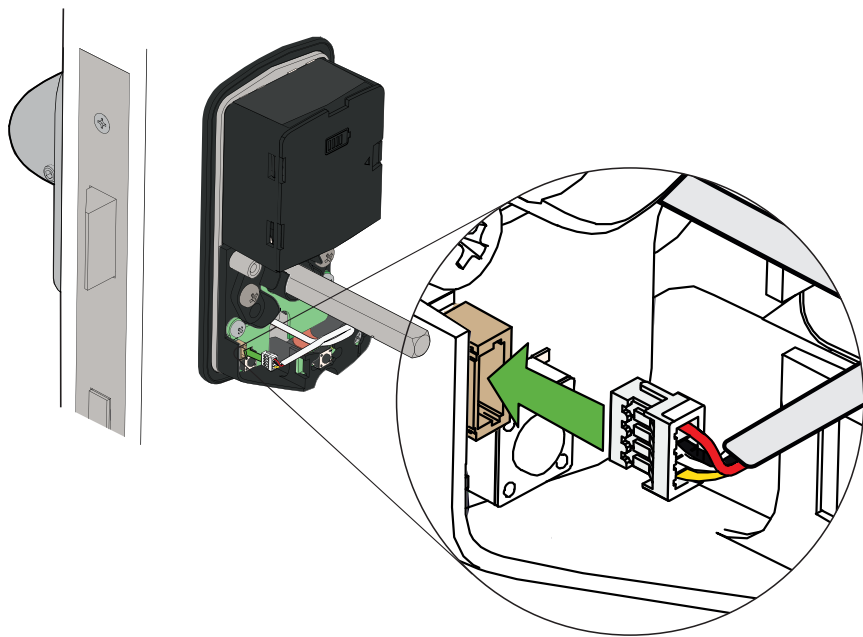

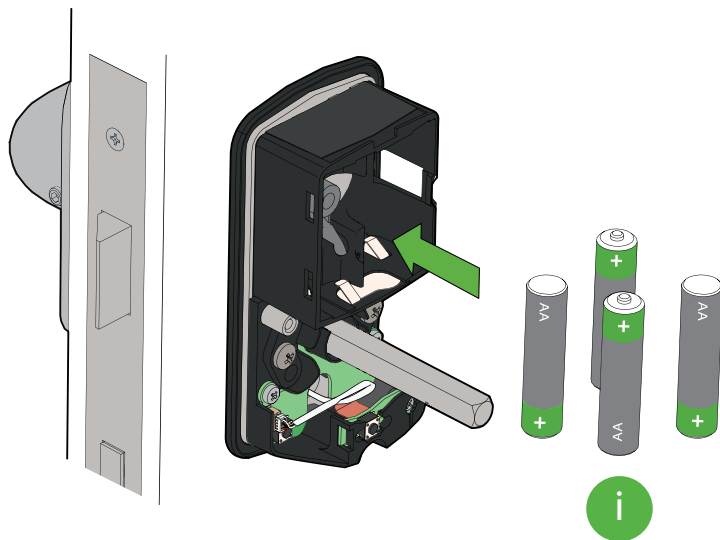


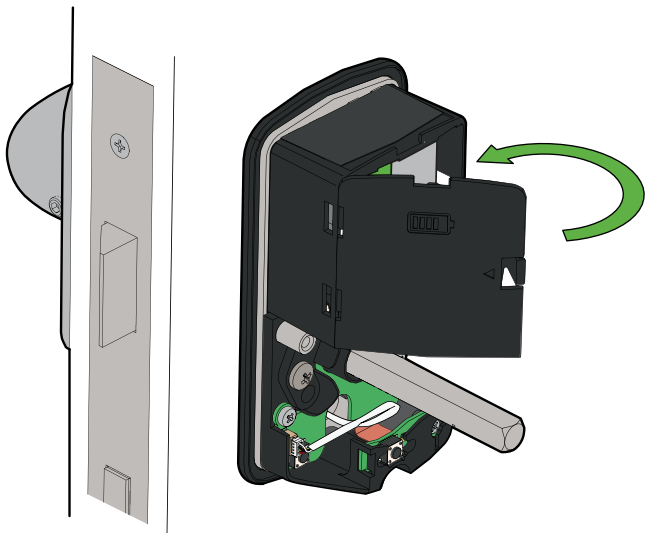

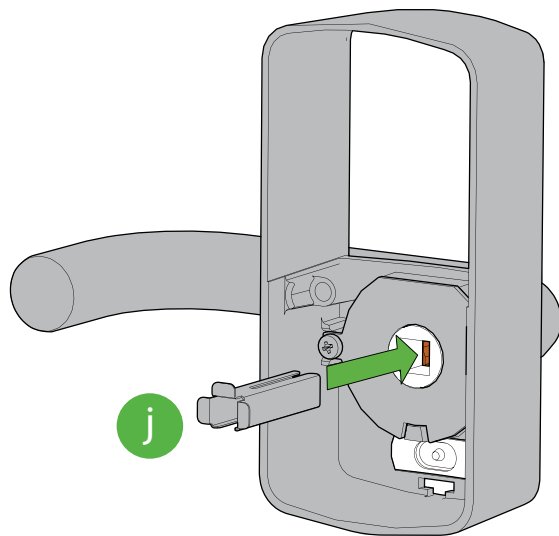


17


k






m4 x 20mm

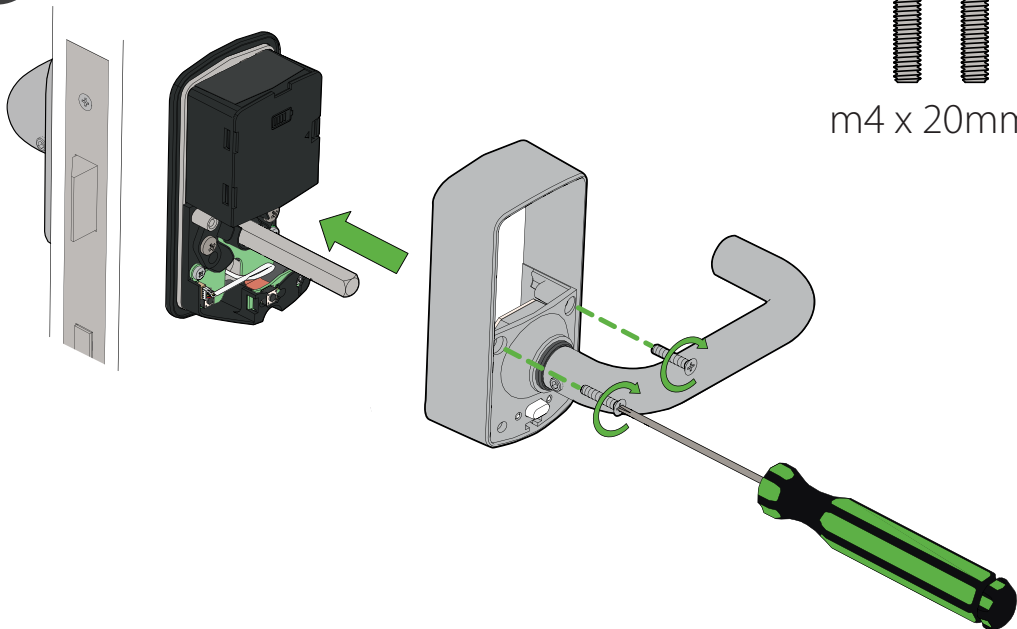


18

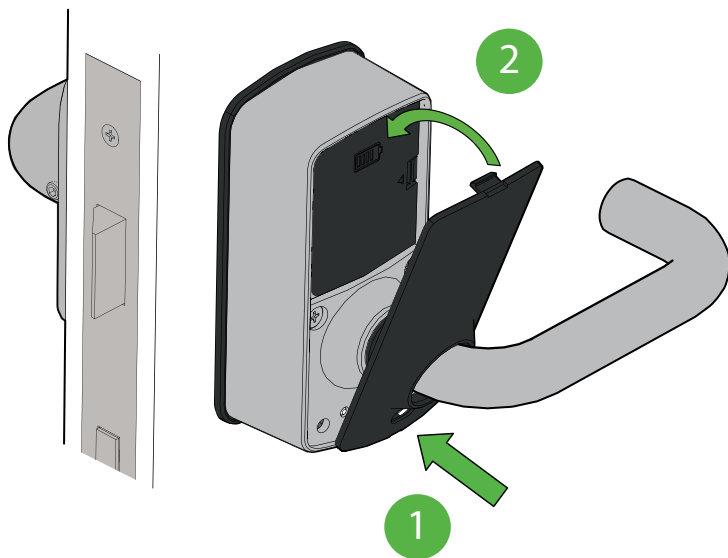

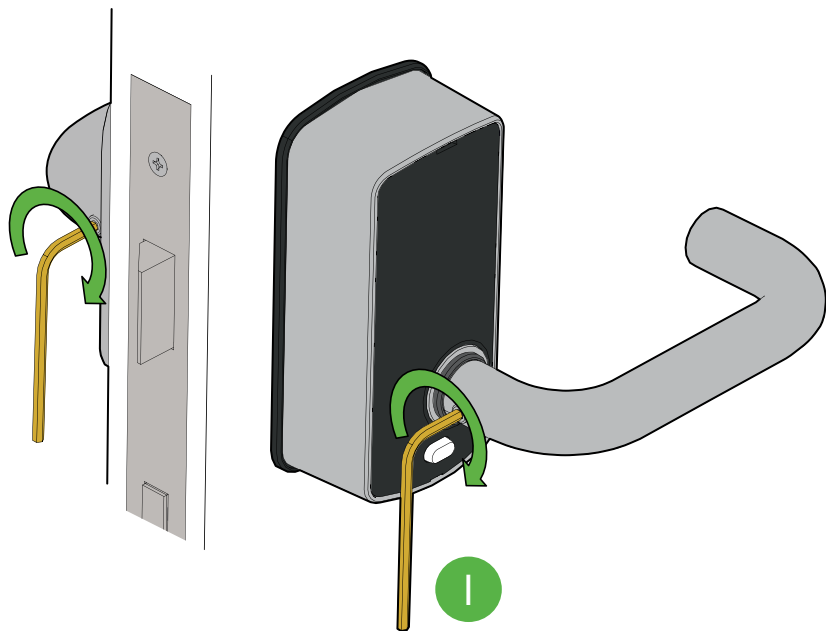

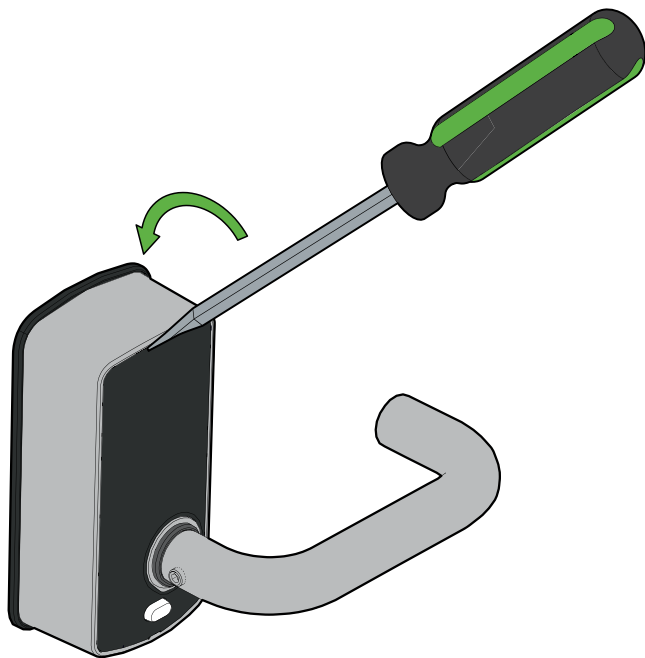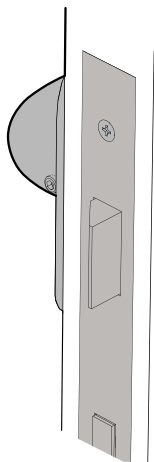

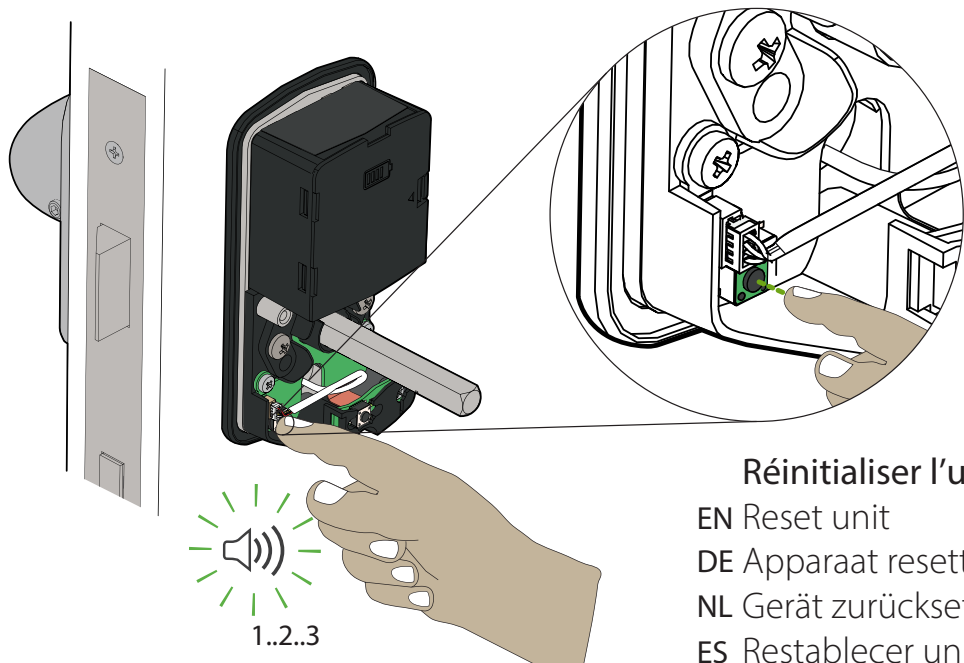

Réinitialiser l'unité

EN Reset unit

DE Apparat resetten

NL Gerät zurücksetzen

ES Restablecer unidad

SE Återställ enhet



<https://Paxton.Info/9940>



<https://paxton.info/9941>

Standalone



<https://paxton.info/9942>



www.paxton.info/9943



≤ 50000



Bluetooth®
Low energy technology



-20°C - +55°C
-4°F - 131°F



-0°C - +49°C
-32°F - 120°F




$\leq 10\text{mm}$



4 x AA Alkaline




3m - 15m
10ft - 65ft



35 - 62mm



6V
800mA




IP55
IK10


900 - 053-F



900 - 054-F

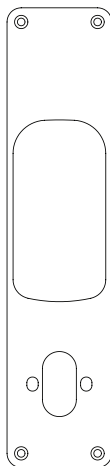

900 - 056-F

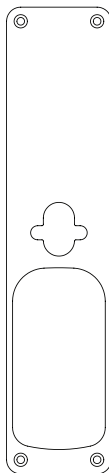



Contact details are provided at: <http://paxton.info/596>

900-700

These products are not suitable for retail sale. All warranties are invalid if these products are not installed by a competent person.

Parts of this product are Copyright (c) 2013-2015 Atmel Corporation. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of Atmel may not be used to endorse or promote products derived from this software without specific prior written permission.
4. This software may only be redistributed and used in connection with an Atmel microcontroller product.

THIS SOFTWARE IS PROVIDED BY ATMEL "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT ARE EXPRESSLY AND SPECIFICALLY DISCLAIMED. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.



Regulation (EU) 2023/1542(Battery Regulation): This product contains a battery, and it is in conformity with the Regulation (EU) 2023/1542. The battery cannot be disposed of as unsorted municipal waste in the European Union.

According to the Batteries and Accumulators (Placing on the Market) Regulations 2008 and the Waste Batteries and Accumulators Regulations 2009: This product contains a battery that cannot be disposed of as unsorted municipal waste in the United Kingdom.

See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), or lead (Pb). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

The PaxLock Pro 2 is BS EN 1634-1:2014+A1:2018 compliant, for use on FD30 & FD60 Fire resistance doors. Compliance is subject to the following conditions:

PaxLock shall be installed in conjunction with an appropriately rated mortice lock case. The fire test and assessment reports are available on request. For further details on the conditions of compliance, contact details are provided at: <http://paxton.info/596>

The Unified PaxLock Pro 2 is only EN179 compliant when used with the Paxton Access EN179 accessory kit (sales code 901-018).



Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of the Directive 2014/53/EU. <http://paxton.info/4867>

The full declaration of conformity is provided at: <http://paxton.info/9970>



<https://paxton.info/9909>