Ins-30113 PROXIMITY P series Mifare reader



Technical Support

01273 811011



support@paxton.co.uk

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)

Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - http://www.paxton.co.uk/

Suitability

Security-sensitive doors



Mounted on metal surface



Wet environments



Readers mounted together

300 mm between readers

Fitting




Reader covers

Additional covers are available in black, white, grey, blue and silver. Registered installers can order these free of charge by logging onto the secure installer extranet: http://paxton.info/1035 or if you are not a registered installer please call us on: **01273 811011** for more information.

Cable extensions

Readers can be extended using Belden CR9540 10-core overall screened cable to a maximum of 100 metres.

Wiring

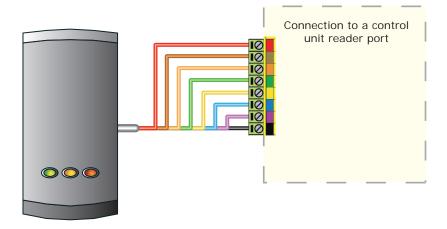


Connection modules



Reader junction box (325-020)

This module can be used to provide a connection point for the reader RJ45 plug. The terminals on the module are then wired colour for colour to the controller.

Alternatively, the reader can be wired directly into the screw terminals of the control unit by first cutting off the RJ45 plug and stripping back the wires in the cable.



Reader port module (325-030)

This module may be purchased separately to speed up the installation and replacement of readers.

The reader port module is designed to convert the standard reader ports on Switch2 and Net2 controllers to accept one or two RJ45 connections. Pull off the screw terminal block from the reader port and simply replace it with this module.

Further information on how to purchase Installer Tools is available at: http://paxton.info/841

			Specific	ations					
Environment		lin	•	Max	-				
Operating temperatures - all items			-35	-35 °C		+66 °C			
Waterproof							Yes - Rated IPX7		
Cable length								5 metres	
Electrical			M	Min		Max			
Voltage			10V	10V DC		14V DC	14V DC		
Current						170 mA	170 mA		
Carrier frequency							125 kHz		
								13.56 MHz	
Clock and data bit period			570	570 μs		700 µs			
Dimensions			Wi	Width		Height		Depth	
			50	50 mm		100 mm		15 mm	
Token type and read range									
Mifare 1K	50 mm	Net2 k	Net2 keyfob			EM4100 keyfob		50 mm	
Mifare 4K	40 mm	Net2 to	Net2 token			EM4100 card	EM4100 card		
Mifare Ultralight / C	25 mm	Net2 w	Net2 watchprox			EM4100 prox	EM4100 proxdisc		
Mifare Desfire	20 mm	Hitag2 ISO		70 mm		Hitag1 ISO		60 mm	
		Hands	Hands Free Token		1				

This product is not suitable for retail sale. All warranties are invalid if this product is not installed by a competent person.

