


## Overview

Continuing Paxton's long-standing tradition, offering a wide variety of reader types to suit all applications, the Slimline Reader has been designed to blend seamlessly into any interior style whilst offering ultimate installation simplicity via its 5m/ 16ft encapsulated cable.

The Slimline Reader, in its low profile compact package still provides all the functions you would expect from a Paxton10 reader. It supports all leading token types, including HID Prox®, MIFARE®, Paxton and EM, as well as offering Bluetooth for communication with long range or handsfree credentials and mobile telephones via the Paxton app.

## Features

- Multi-format reading technology offering compatibility with Paxton, MIFARE®, HID Prox®, EM and more
- Low power sleep mode with capacitive wake-up
- Built in Bluetooth Low Energy support to allow communication to mobile and wearable devices
- Simple 2-part construction with encapsulated 5m/16ft cable
- IP67 rated
- Simple 4 wire installation

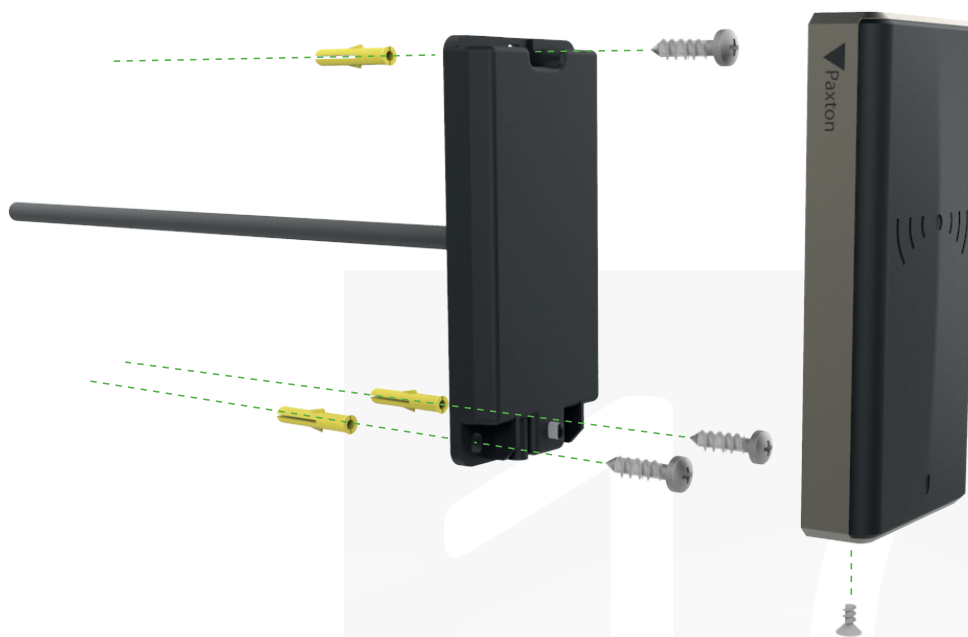



## Token compatibility

125 kHz	Paxton Hitag2, EM4100/02, HID® Prox
13.56 MHz	MIFARE® Classic (CSN only)
	MIFARE® DESFire® EV1/EV2/EV3 (CSN only)
	MIFARE® Plus (CSN only)
	MIFARE® Ultralight® (CSN only)
	MIFARE Ultralight C® (CSN only)
	MIFARE® Mini® (CSN only)
	Sony FeliCa Lite-S (CSN only), NFC®



## Electrical

Power consumption	1W (Max)
Operating voltage	12V
Current Draw	40mA (Quiescent) 100mA (Max)



## Communication

RFID frequency	125kHz & 13.56MHz
Data connection	RS485/Paxton10 protocol
Bluetooth®	2.4 GHz
Token Mode	Up to 2cm
Touch to Enter	Up to 1.5m
Long Range	Up to 10m



## Hardware

Dimensions (W x H x D)	49mm x 104mm x 17.2mm
Cable Type	22AWG, 4 core twisted pair
Cable Length	5m
Maximum cable extension length (Controller > Reader)	100m
Sound	Piezo Buzzer
Colour	Black
Housing material	PC+ABS
Warranty	Paxton 5 year



## Environment

Operating temperature	-35°C - +66°C
IP Rating	IP67
Mounting	Surface only, suitable for mounting on metal, please see APN-0001