

Paxton10 - Desktop Reader

Paxton10


Overview

The Paxton10 Desktop Reader compliments the Paxton10 Reader by concurrently reading all supported token formats with no additional configuration required. The slimline profile and subtle branding are consistent with the rest of the Paxton10 family of products.



Features

- Multi-format reading technology offering compatibility with Paxton, MIFARE[®], HID[®] Prox and NFC
- Brings Paxton simplicity to the plethora of token types on the market, by supporting them all concurrently
- Discrete form factor for desktop mounting
- Simple USB connection
- Paxton simplicity - zero configuration installation
- Attractive slimline design

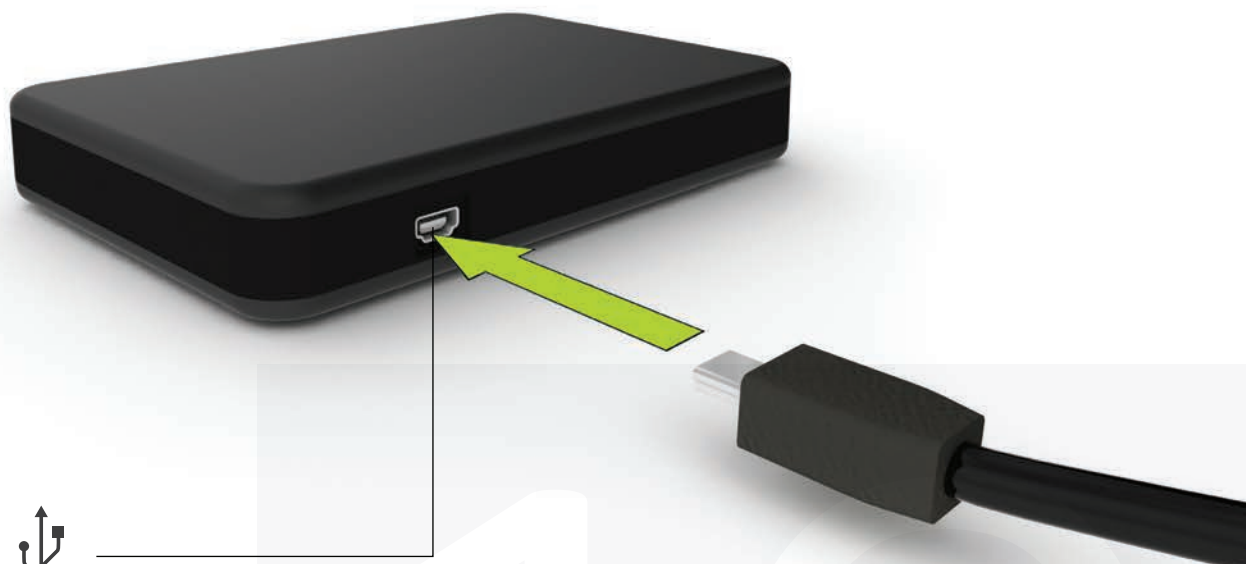

Mini USB





Token compatibility

Paxton		
Frequency		125kHz
Data read		Serial number (CSN) & User memory
Cloning resistance		Medium
EM4100/02		
Frequency		125kHz
Data read		Serial number (CSN)
Cloning resistance		Low
MIFARE®		
Frequency		13.56MHz
Data read		UID
Cloning resistance		Low



Electrical

Power consumption	0.5 W
Operating voltage	5V (USB)



Hardware

Dimensions (W x H x D)	115mm x 19mm x 75 mm
Cable type	Mini USB to USB cable (supplied)
Cable length	1.8m
Warranty	Paxton 5 year



Environment

Operating temperature	0°C - +49°C
IP rating	N/A



Accessories and Sales codes

010-387	Paxton10 - Desktop reader
---------	---------------------------

MIFARE®, MIFARE® Classic, DESFire, MIFARE® Plus and MIFARE® Ultralight C are trademarks of NXP B.V.

*NFC refers to NFC enabled cards and tokens and does not include the use of smartphones

